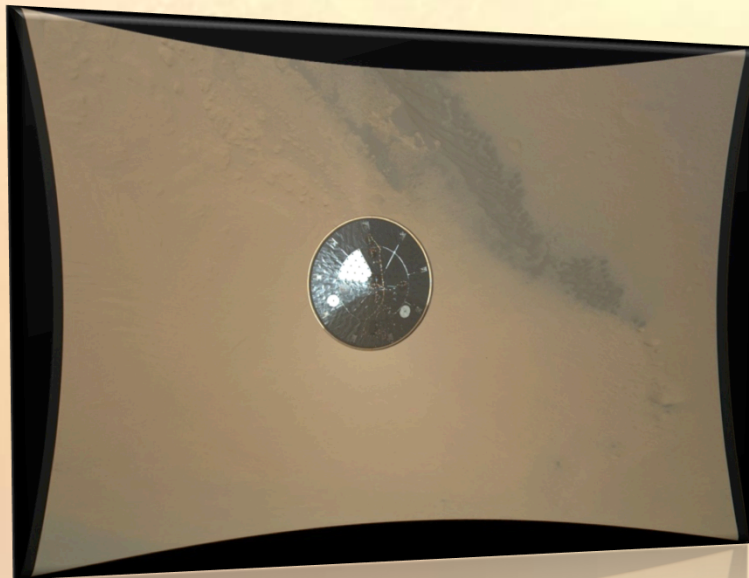# Space Technology Program Recent Successes

MSL Entry, Descent, and Landing Instrumentation (MEDLI)

Inflatable Reentry Vehicle Experiment 3 (IRVE-3)

Briefing for
NASA Advisory Council
*Technology and Innovation Committee*

November 15, 2012

Dr. Neil Cheatwood
*MEDLI PI*
STMD/GCD EDL PI

MEDLI: MSL Entry, Descent and Landing Instrumentation

- **MEDLI consists of 7 pressure ports, 7 integrated sensor plugs, and support electronics**
- **Gathered engineering data during entry and descent for future Mars missions:**
  - Aerothermal, aerodynamic, and thermal protection system performance
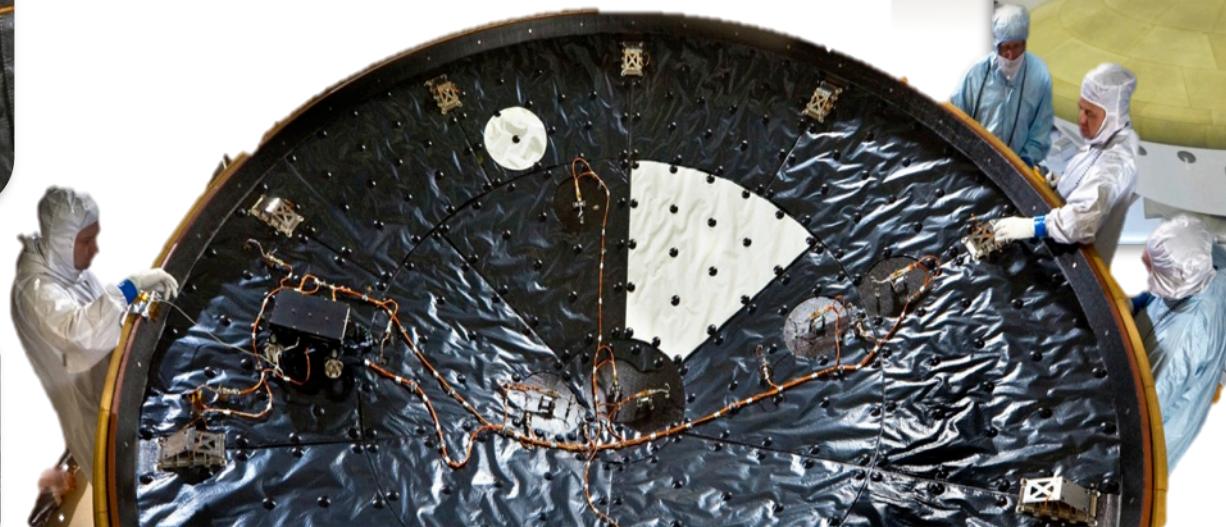 - Atmospheric density and winds
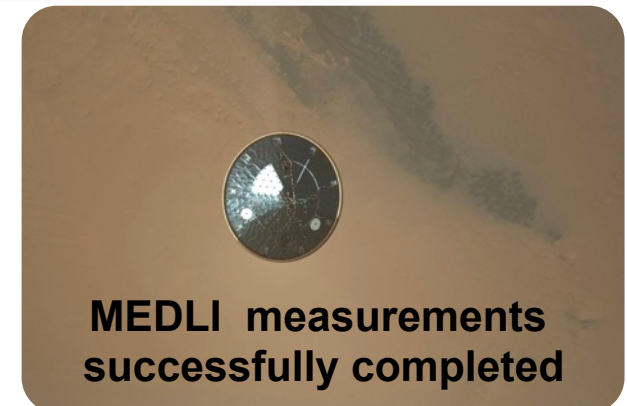
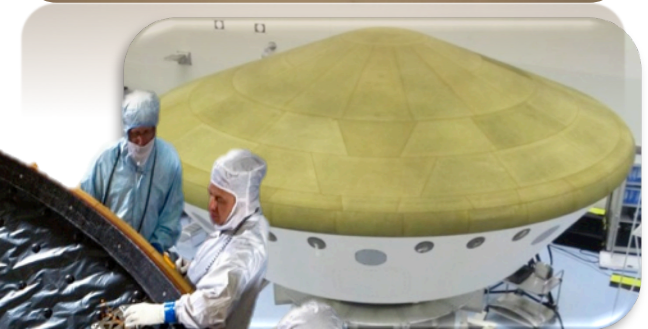**MEDLI measurements successfully completed**
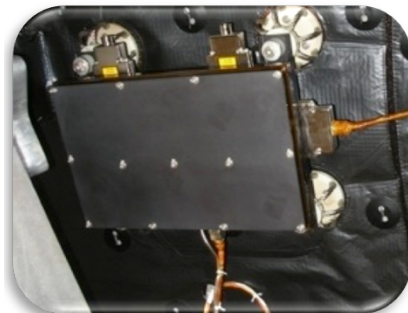
Sensor Support Electronics

Mars Entry Atmospheric Data System (MEADS)

The MEDLI instrumentation makes MSL the first extensively instrumented heatshield ever sent to Mars

MEDLI Instrumented Sensor Plug (MISP)

P-MISP-061708-01

MSL Entry, Descent and Landing (EDL) Sequence

Cruise Stage Separation

Entry Interface

Guidance

MSL/MEDLI Enter Martian Atmosphere:
E 0 hrs ~6 August 1:24 AM EDT

Parachute Deployment

Heatshield Separation

Backshell Separation

Powered Descent

MEDLI Powered Off:
E+5 Min ~6 August 1:24 AM EDT

Sky Crane

Flyaway

3
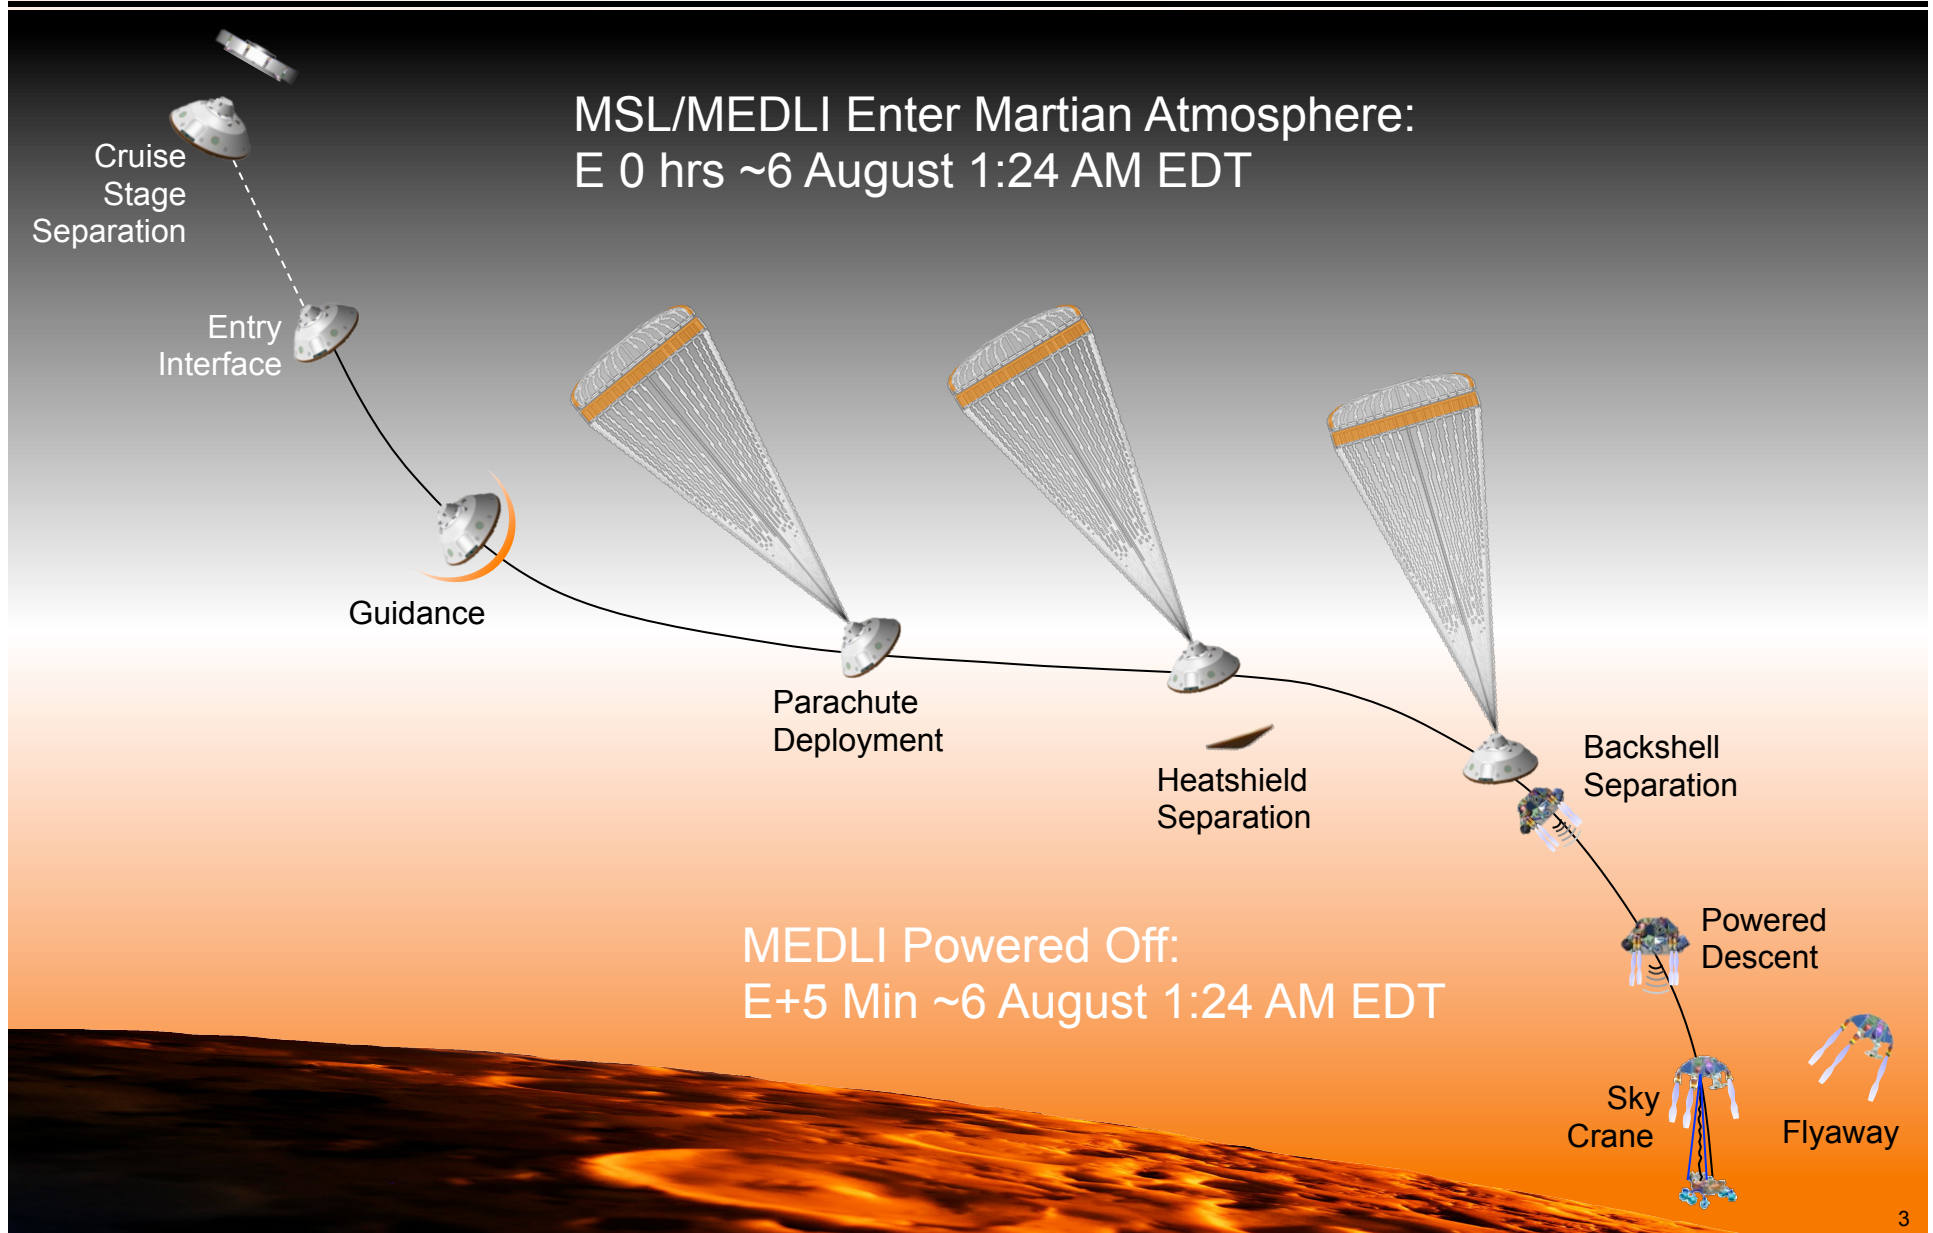
MEADS measured 7 forebody pressures behind a bow shock wave

- **MEADS algorithm matches 7 MEADS pressures to best fit LAURA CFD predicted pressures**
  - Identifies: alpha, beta at the best-fit CFD surface
  - Pressure magnitudes with CFD determines dynamic pressure
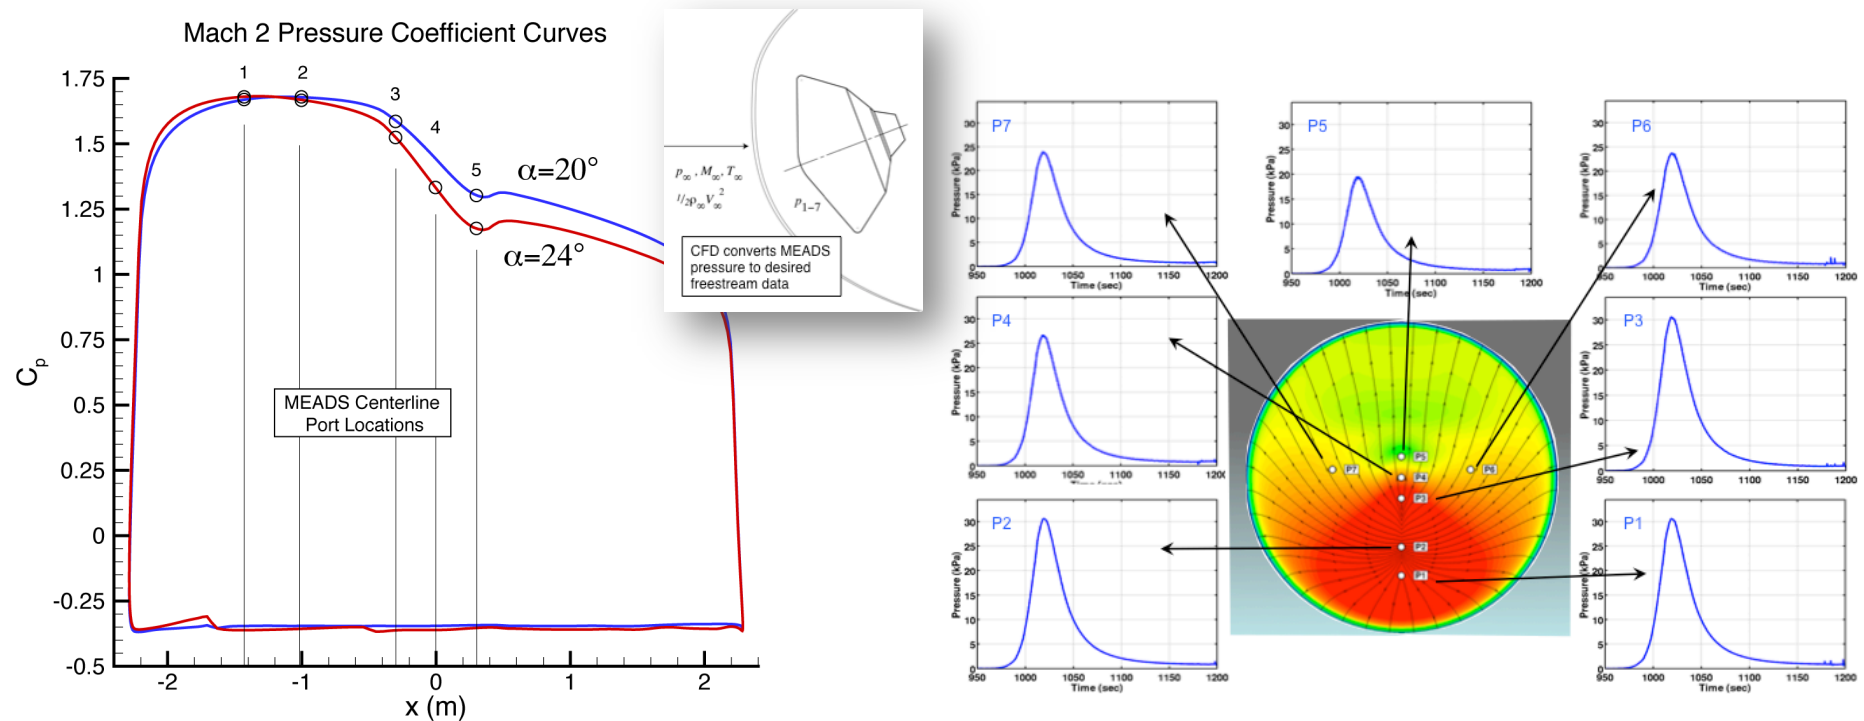 - Mach can be extracted with or without IMU velocity data (IMU helps greatly)

- **Angle measurements are relative to the approaching velocity vector seen by the heatshield**

Mach 2 Pressure Coefficient Curves

MEADS Centerline Port Locations

CFD converts MEADS pressure to desired freestream data

**MEADS/DIMU combined reconstruction converged to CFD surface predictions very well**

- **MEADS measurements appear to be very clean and agree very closely with CFD predictions**
  - Ports 1, 2 determined stagnation pressure accurately
  - Residuals for all ports over entry MEADS-Valid range (q > 850 Pa) are ~1% of READING or less (much less over much of the trajectory)

Examples of MEADS Centerline Ports
Measured (flight) vs. interpolated CFD (solver)

Mach 4.0, Alpha -16.4°   Mach 18.0, Alpha -18.9°
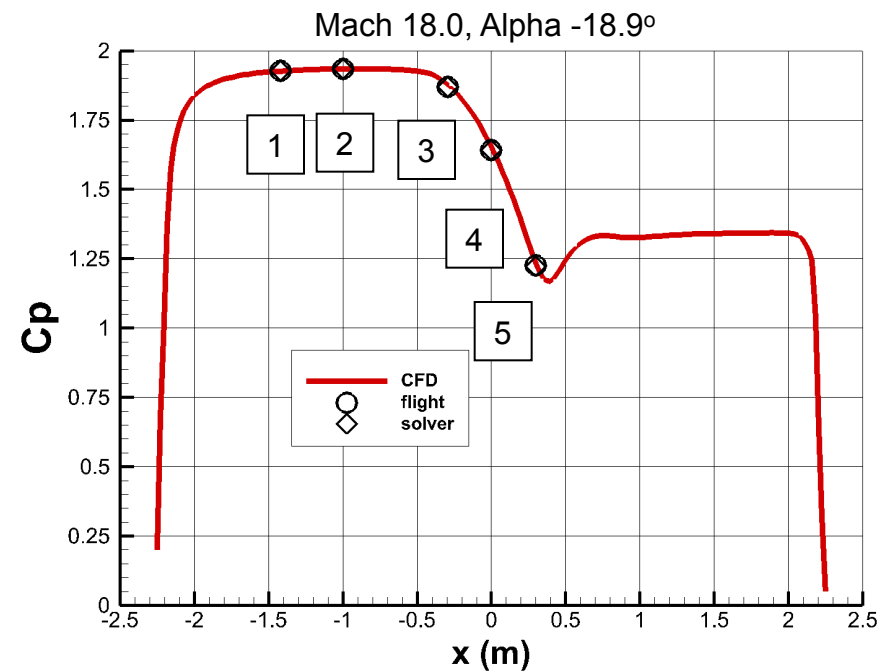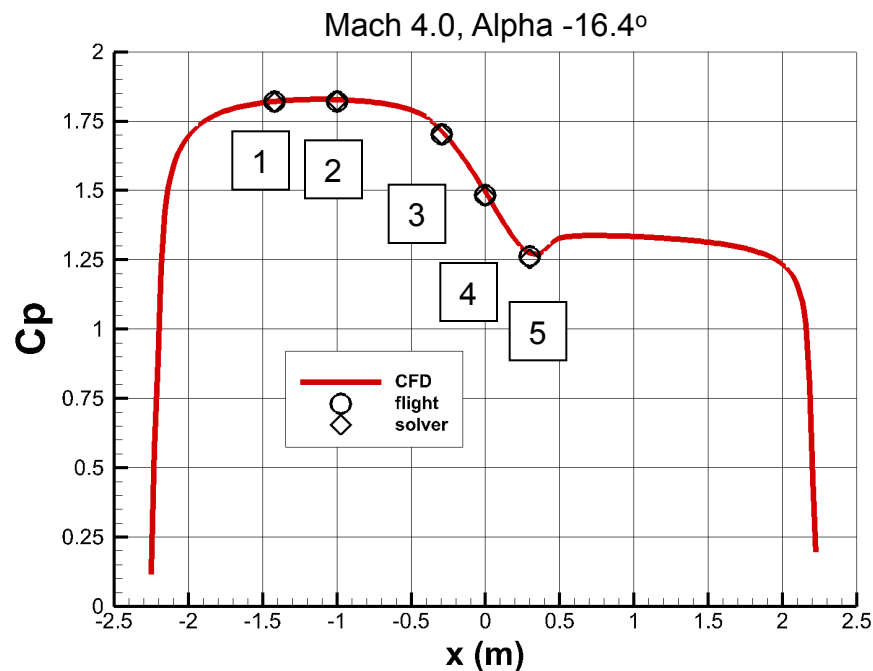
Reconstructed Density

Density can be determined from accelerometer a reconstructed freestream velocity using dynamic pressure (from MEADS) or the preflight axial force coefficient (ADB). Both versions show very close agreement until low altitudes and velocities.

- Currently the IMU reconstruction assumes no wind velocity (solid mass of atmosphere rotating with Mars)
- The slower the capsule velocity, the greater the error from winds when extracting density and freestream velocity out of dynamic pressure measurements
- Preliminary sensitivity studies show that the two density profiles can be brought into close agreement by solving for a best-fit prevailing eastward wind
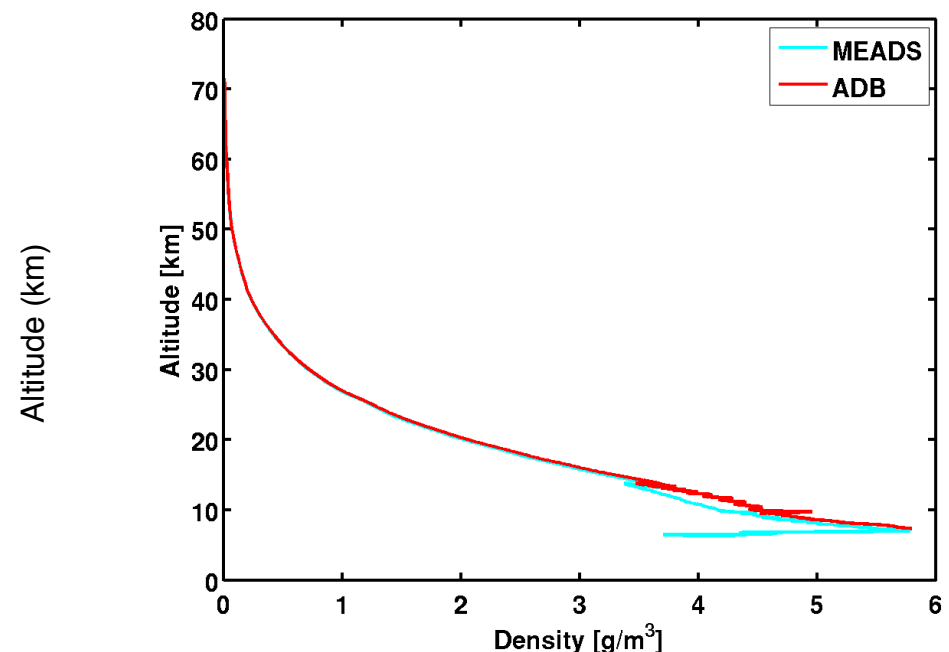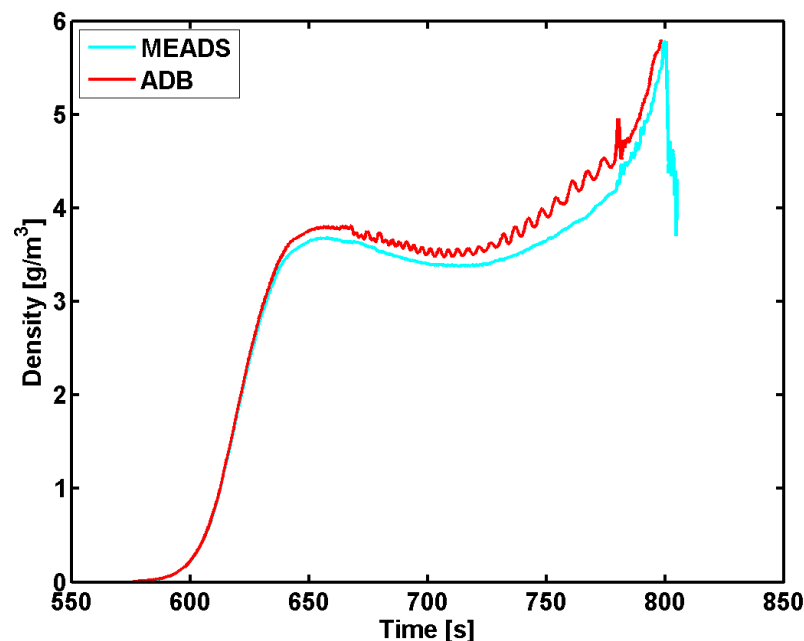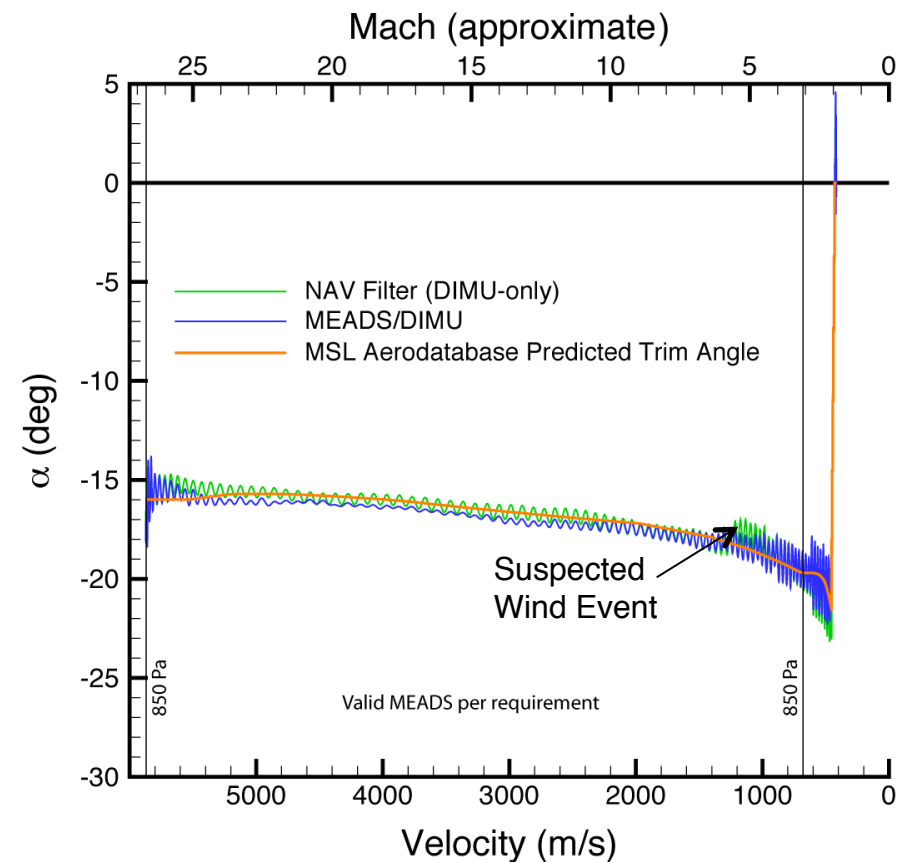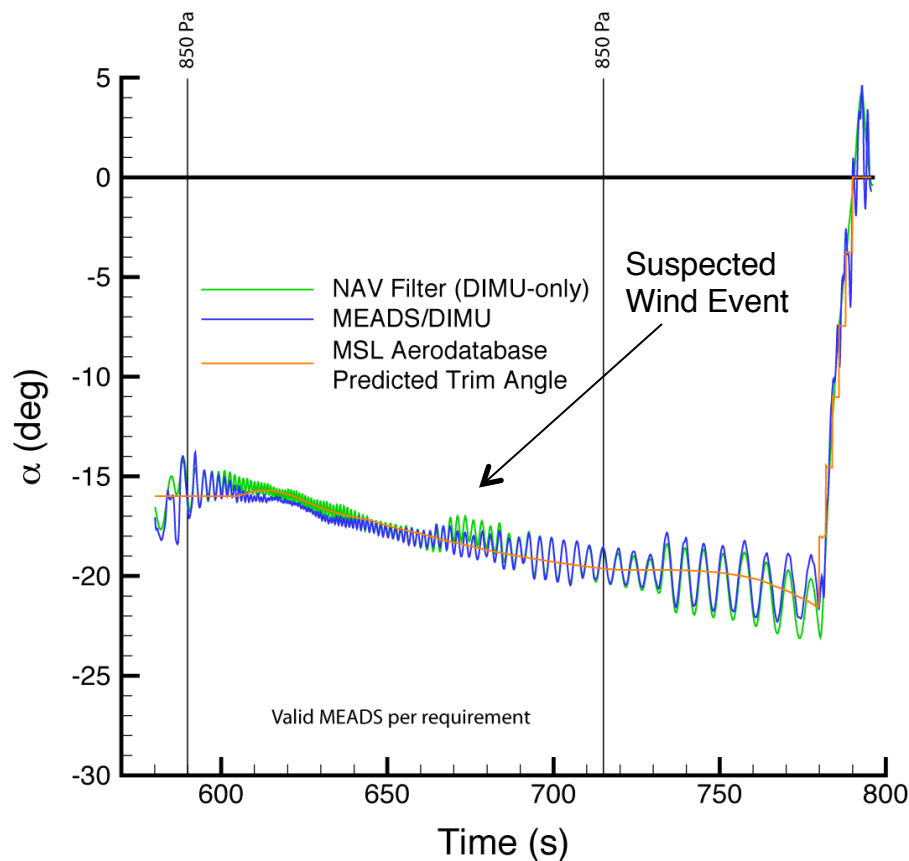
- **Excellent agreement between reconstructed angles of attack and preflight predictions**
- **MEADS differs from DIMU (and predicted) by ~0.4 deg in hypersonic regime (better at supersonic speeds)**
- **Disagreement at 675 sec appears to be significant wind event (fly through "jet stream")**
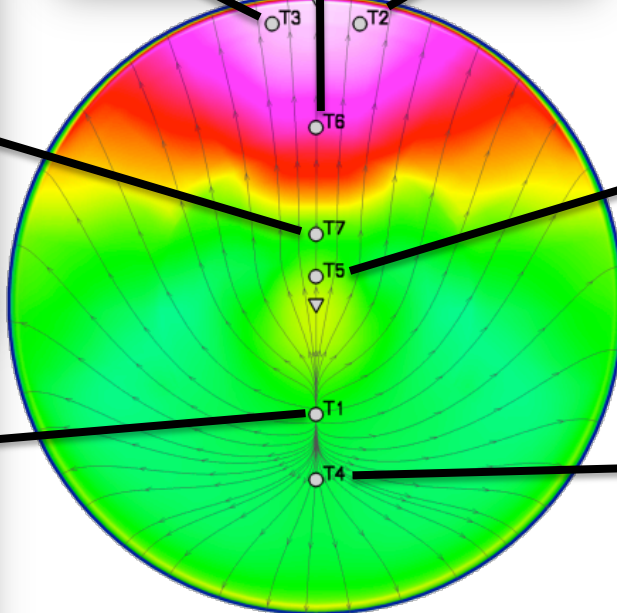 - Focused study pending

Preliminary MEADS Conclusions

- **The MEADS experiment collected a very clean set of 7 port pressures**

- Comparisons to date show MEADS has separated C_A from dynamic pressure to within 2% (PRELIMINARY FINDING!)

- Reconstructions show the MSL Aerodynamic database predicted entry performance very well (trim angle, L/D, Drag)

- Preliminary comparisons suggest we may be able extract prevailing wind during entry as well as the magnitude of at least one significant wind shear event

- As expected prior to flight, MEADS accuracy is dominated by CFD uncertainties

- Next: Kalman filtering of all available data will identify a best fit with uncertainties

Boundary Layer Transition to Turbulence

Top TC data @ each MISP location

Time derivative of temperatures

Turbulence Onset

T=64 s

T=65 s
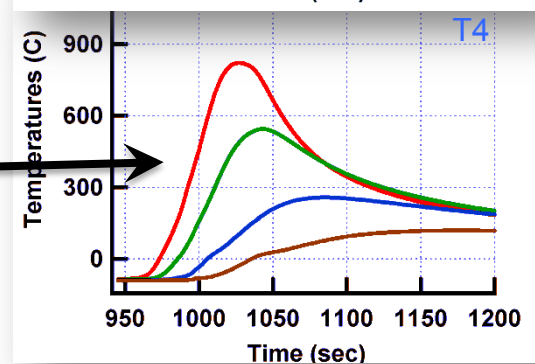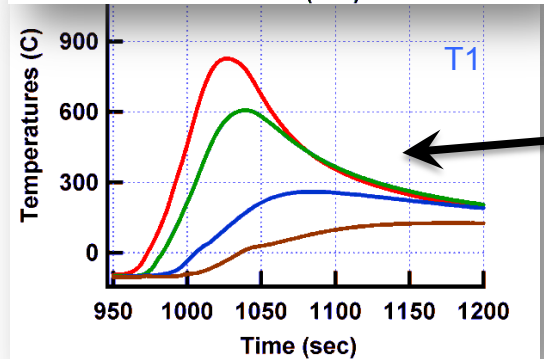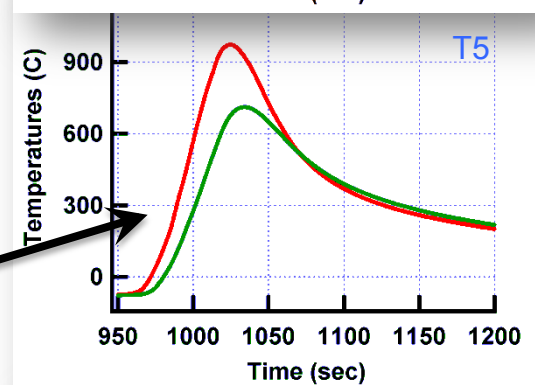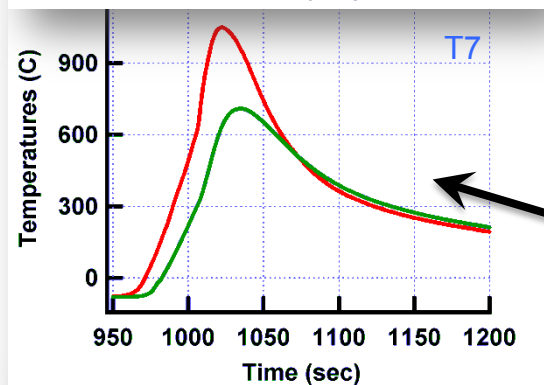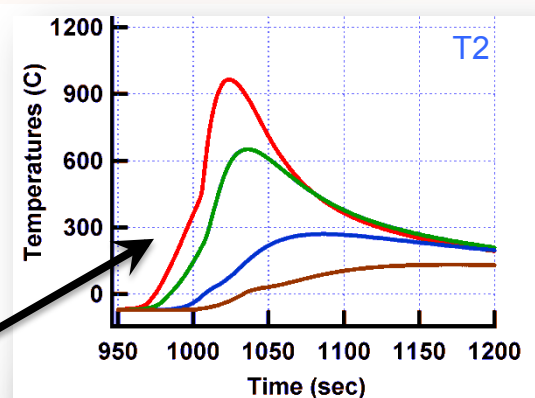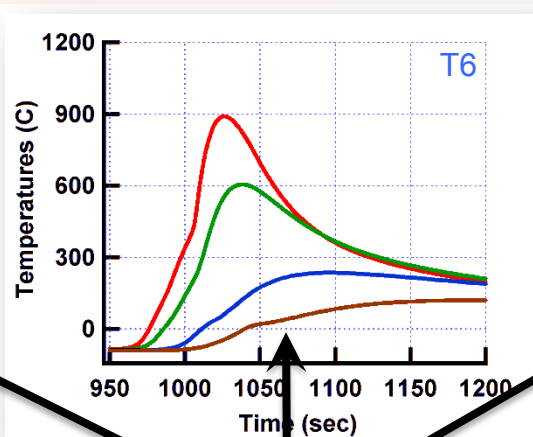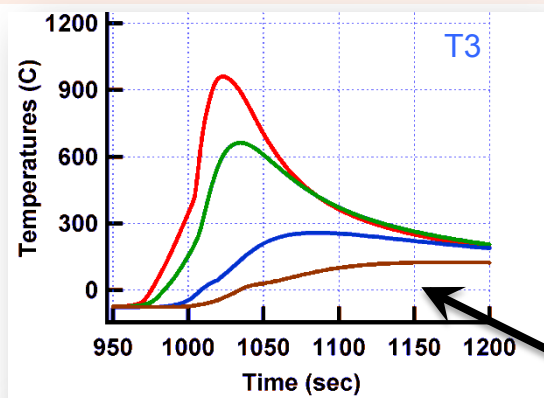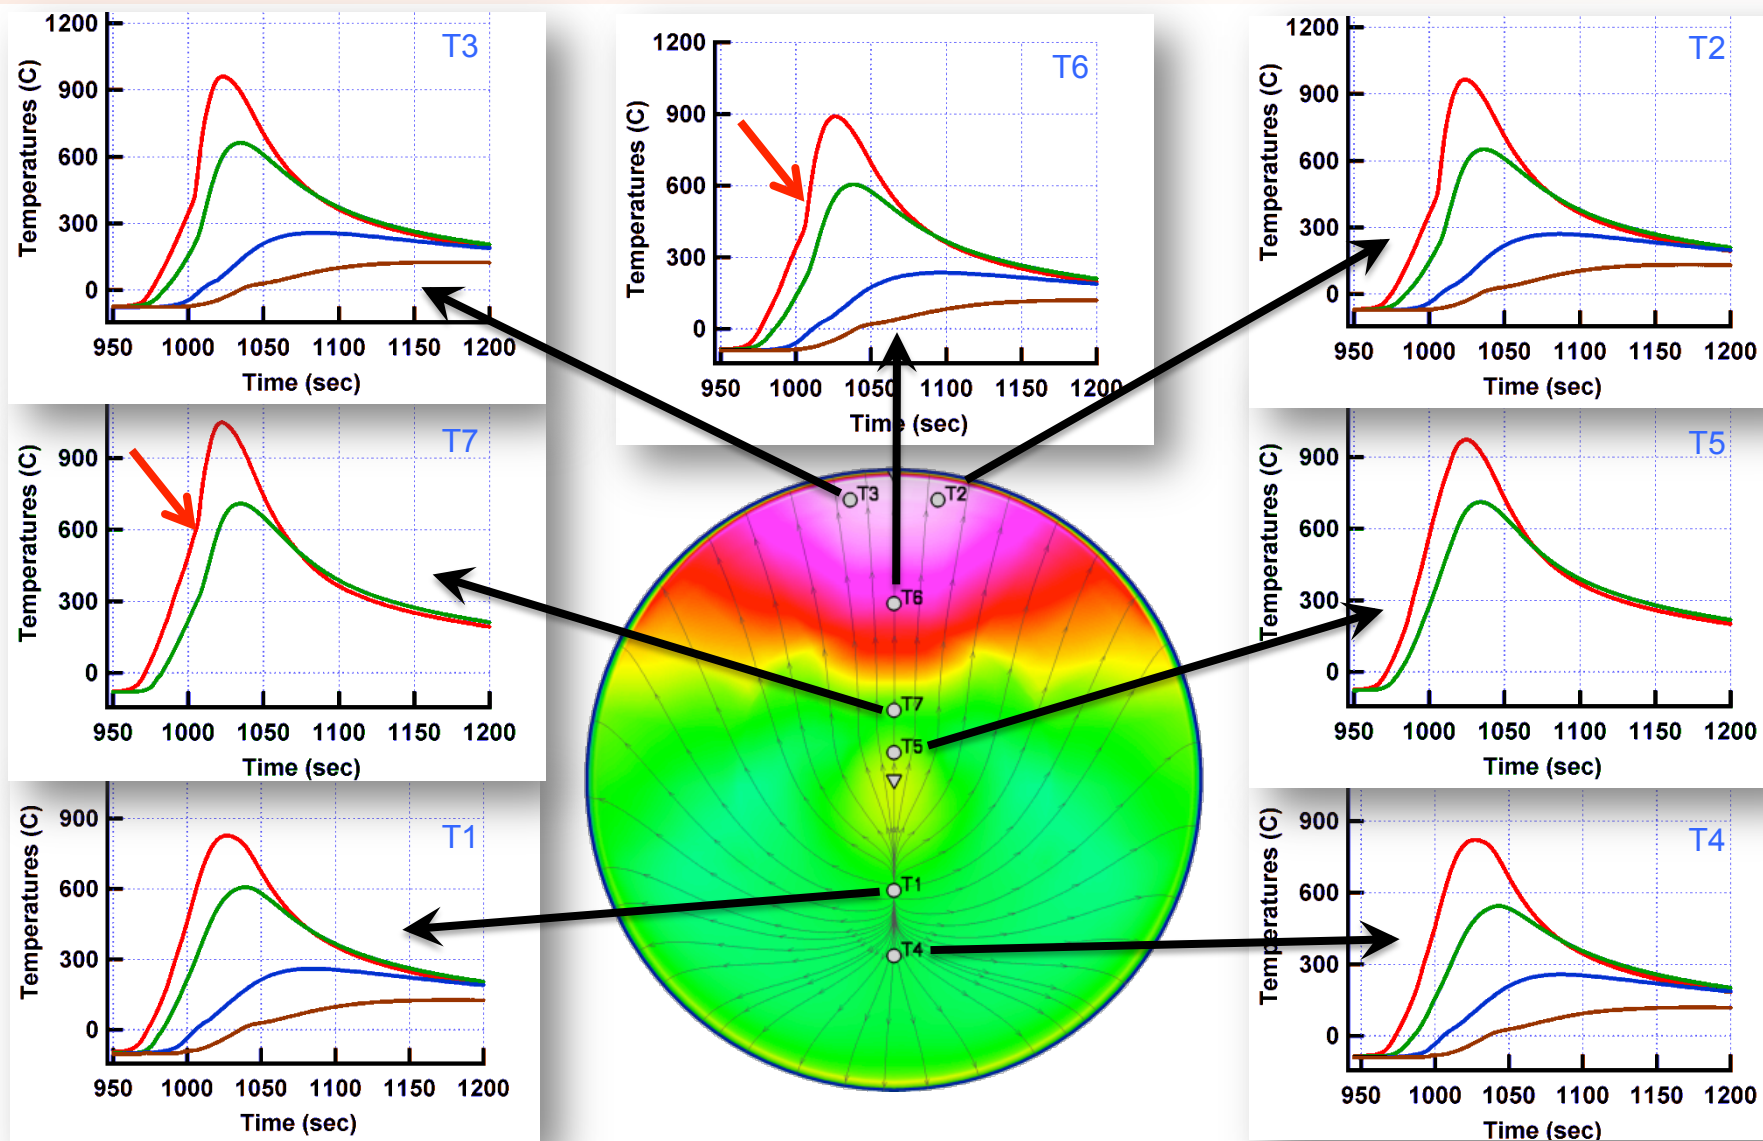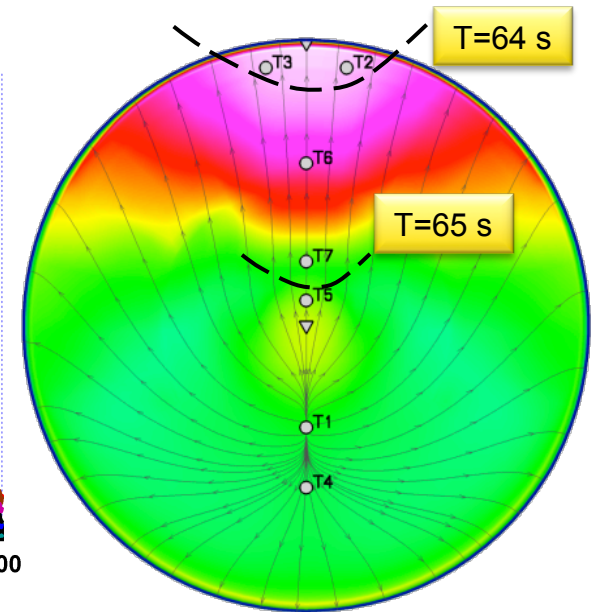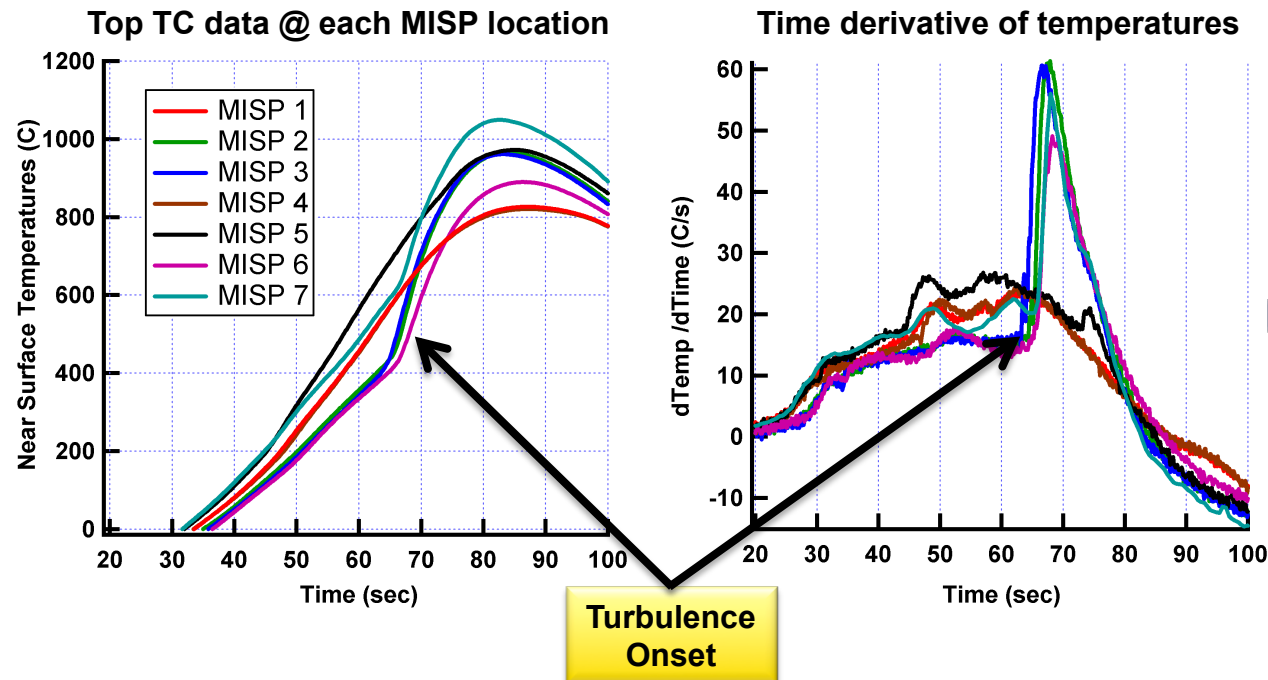
- **Onset of turbulence evident in MEDLI temperature data**

- **Transition front moves from leeside forward until it reaches MISP 7**

- **The wind-side flow remains laminar**

- **Turbulence occurs later than predicted (using Reθ=200 correlation) and proceeds to MISP 7 within 2-3 seconds**

- **The possibility of tripped (roughness induced) turbulence being explored**

Turbulent Onset Time

Plug Location	Flight	Reθ=200
	Sec	Sec
MISP 3	63	56
MISP 2	64	56
MISP 6	65	58
MISP 7	65	70

Leeside Turbulent Region Temperature Comparison

Solid Lines: MEDLI Data
Dashed Lines: Model Predictions
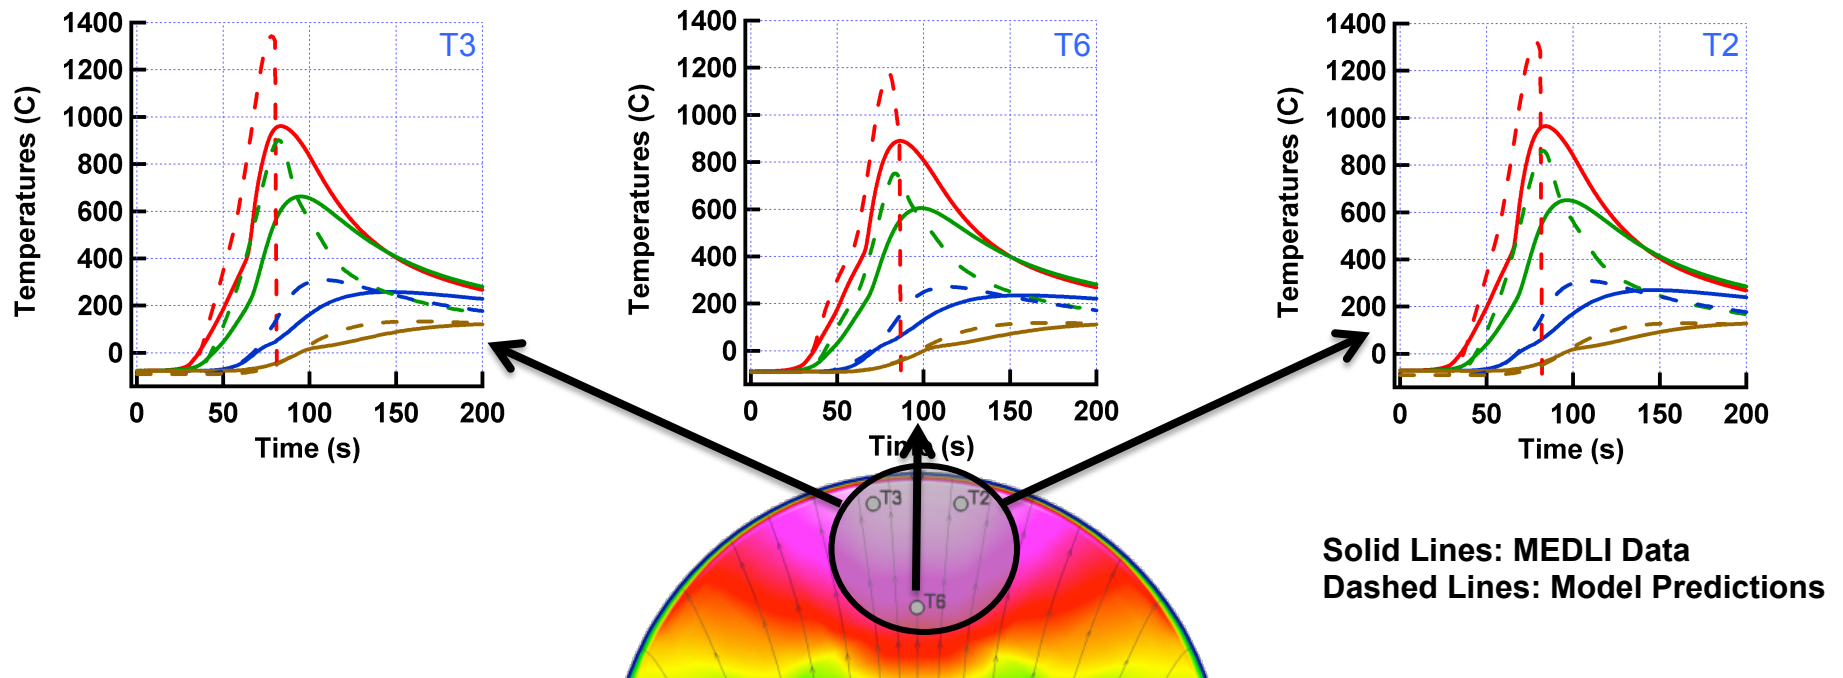
- Significant turbulent heating predicted in the leeside region

- Heatshield design environments were taken at these points

- While onset of turbulent flow is evident, the heating augmentation is significantly below prediction

  – This appears to be the most significant finding from the MEDLI-MISP data

- **Maximum Temperature (at 0.1-in initial depth):**
  - Leeside Turbulent Region: Predicted temperature 1325 ^oC vs. 965 ^oC in flight
  - Apex Region: Predicted temperature 839 ^oC vs. 1050 ^oC in flight
  - Stagnation Region: Predicted temperature 709 ^oC vs. 820 ^oC in flight

  > **Model Predictions
  > not Conservative**

  - Possible Causes
    - Inadequate prediction of boundary layer transition to turbulence
    - Low turbulent augmentation
    - Low recession
    - Inadequate shock layer chemistry model

- **Onset of Turbulent Flow:**
  - Transition to turbulence occurred later in flight than predicted
    - Predicted 56 sec, observed in flight at 63 sec
  - Transition front moved upstream quickly, slower movement was predicted
  - Roughness induced transition being explored as possible cause

- **TPS Recession:**
  - Recession estimated less than 0.1 in, smaller than nominal predicted recession of 0.16 in.
  - Finite rate surface chemistry is believed to be the cause

Summary

- **All MEDLI sensors worked extremely well and returned data**

- **MEDLI data has identified differences between model predictions and measurements**
  - Allows for improvement of models

- **High level NASA commitment essential to obtain engineering measurements for future mission benefit**

- **Value of calibration/characterization to quantify errors/uncertainties**
  - Enables proper understanding of flight measurements

- **Instrumentation of New Frontiers/Discovery class missions necessary to expand tool validation with flight datasets**
  - Technology investments required to reduce instrumentation footprint

- **Additional instrumentation improves landing ellipse precision**
  - Backshell temperature and pressure
  - Parachute camera
  - Radiant heating
  - Etc.

Hypersonic Inflatable Aerodynamic Decelerator (HIAD)

- **Mars thin atmosphere makes it difficult to decelerate large masses and limits accessible surface altitudes. Science payload size and site altitude are limited by Viking EDL architecture.**
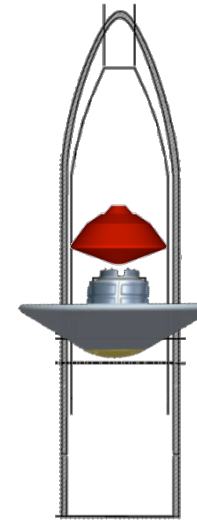
- **Aeroshell size limited by Launch Vehicle fairing**

- **Improved payload access**

- **Lower ballistic coefficient from increased drag area allows higher altitude deceleration (aerocapture or entry) providing access to higher surface elevations, increase in landed mass, and longer EDL timelines.**

IRVE-3 was a flight test of HIAD technology

	MSL	HEART
m=	3300 kg	3500 kg
D=	4.5 m	8.5 m
BC=	125 kg/m^2	40 kg/m^2

Comparable Entry Masses

15m HIAD

Higher altitude over landing site enables pinpoint landing, more timeline margin

4.57m

Altitude, km

Mach Number
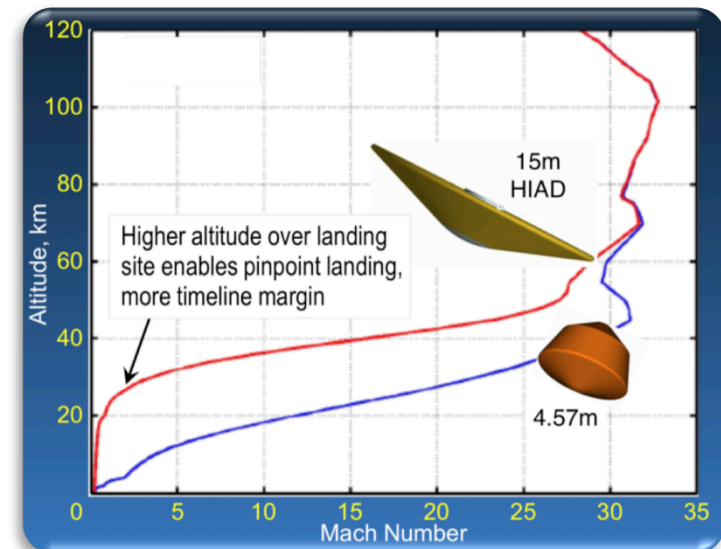
Flexible Thermal Protection Systems

- *Developed new arc jet testing methods for both shear and stagnation tailored to FTPS.*
- *Completed over 100 test samples in the Boeing LCAT Arc Jet Facility to verify Gen 1 FTPS for IRVE-3 (20 w/cm2 heating) and HEART (30-40 w/cm2). Initial tests of lower TRL materials in support of Gen 2 were also tested.*
- *Delivered three 3-m FTPS units (IRVE-3 EDU, IRVE-3 flight unit and the 3-m NFAC unit).*
- *Thermal model version 0.1 was released for Gen 1 FTPS*

Boeing LCAT Stagnation Test (50 W/cm^2)
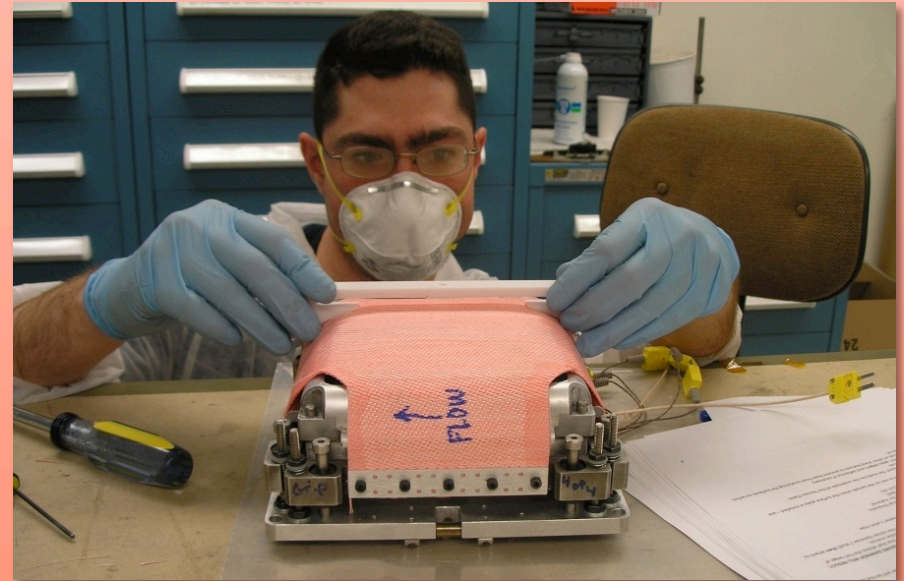
NASA - LaRC Flex TPS
Boeing - St. Louis
LCAT Test Facility
Side View
Run 2345
Arm 3 - Specimen STAG-13C
5/4/2012 12:42:38.00

NASA - LaRC Flex TPS
Boeing - St. Louis
LCAT Test Facility
Side View
Run 2345
Arm 3 - Specimen STAG-13C
5/4/2012 12:46:58.05
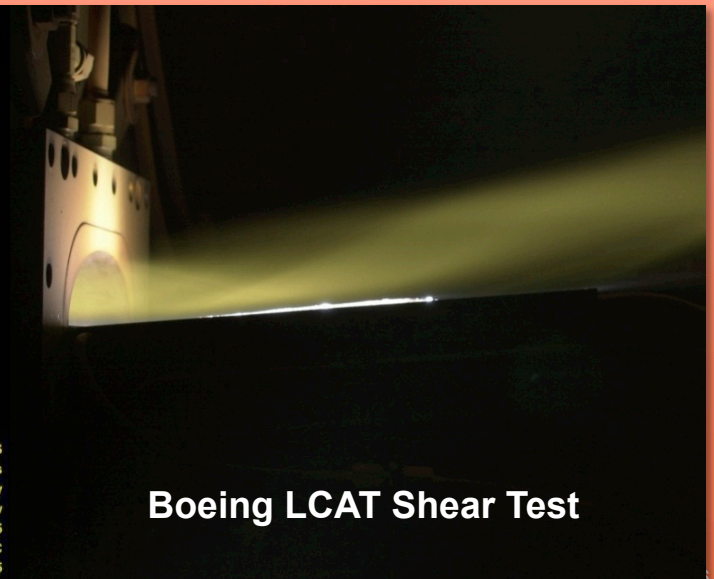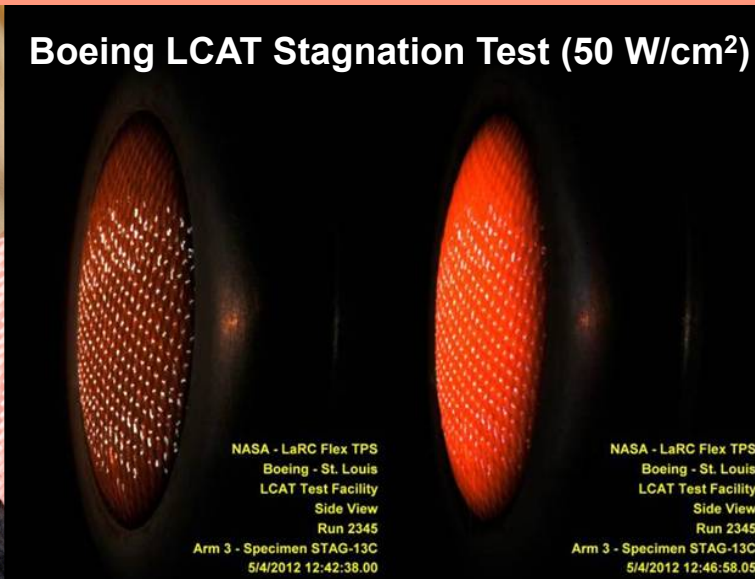
Boeing LCAT Shear Test

Inflatable Structures

- *Fabricated a 6-m inflatable structure (manufacturability at a large scale)*
- *Aero loads testing at NFAC (3-m w/ TPS, and 6-m)*
- *First time use of full-field photogrammetry (4 systems) in a wind tunnel*
- *ARC designed pressure ports on the flexible materials*
- *IDIQ contract awarded 47M (ILC Dover, Lockheed Martin, Airborne)*
- *Completed 10-m conceptual design task*
- *3 tasks awarded for Elevated Temp Article, Elemental Test article and 6-m Article*
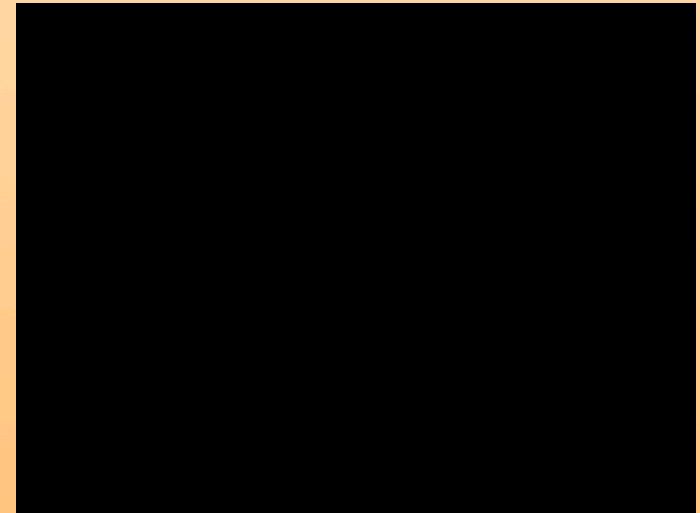
Installation in 40 x 80 ft Test Section
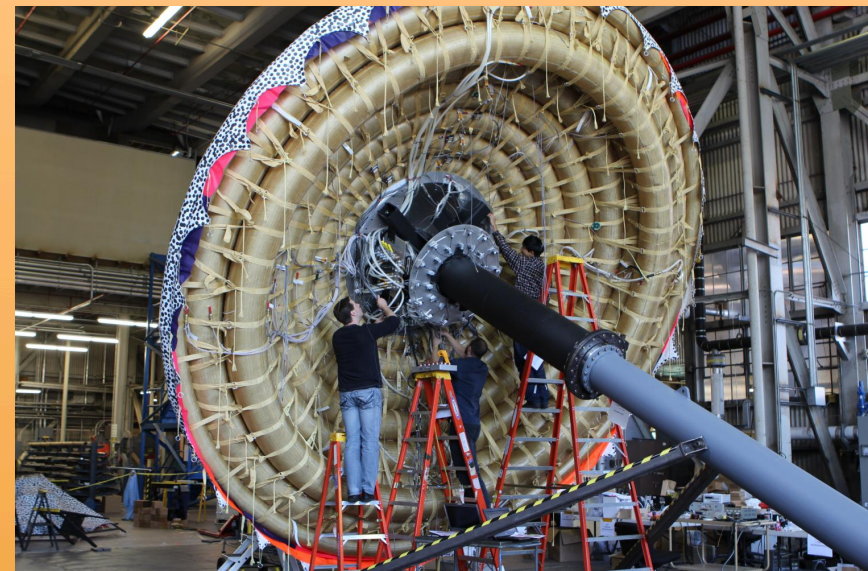
HIAD Next Generation Subsystems

Quantified the supersonic aerodynamic performance of parametric trim tabs as an alternative to ballast mass

In less than 6 months, 38 models were designed, built by LaRC fabrication, and completed 120 hours of testing in the Unitary Wind Tunnel.

Measured the aerodynamic heating on HIAD-relevant fore-body surface deformations in LAL Hypersonic wind tunnels (240 hours).

*Ceramic models with thermo-phosphor coating that give global heating measurements of entire model*

IRVE-FDU Heat Transfer Mapping, Test 6979, Run 116
M_∞=5.9, α=12°, Re_∞=1.09x10^5/ft.

NASA Langley Research Center
Aerothermodynamics Branch
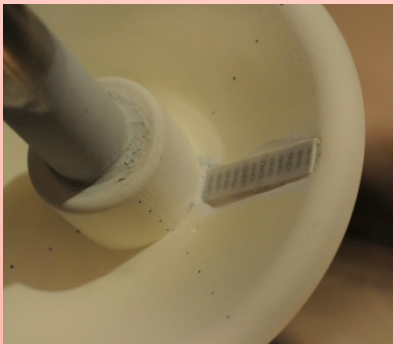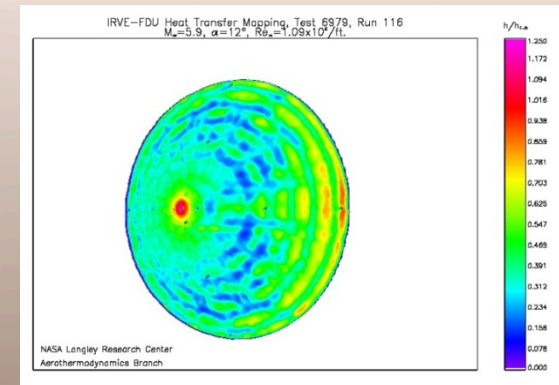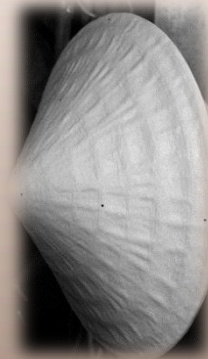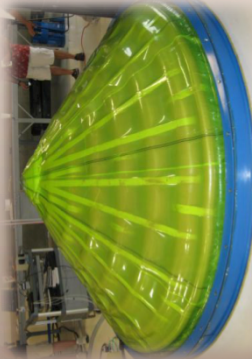
As payloads become wider/longer and/or higher L/D is needed, the centerbody could experience higher heating. Measured the aerodynamic heating on HIAD-relevant centerbody geometries.

LaRC 20-Inch Mach 6 & 31-Inch Mach 10 tunnels used to measure heating on various centerbody geometries (160 hours).

Mission Applications

Developed and enhanced key EDL system models; enabling the evaluation of HIADs within the concept of operations of direct entry and aerocapture missions at Earth and Mars.

Convective and radiative heating, trade space models

Landing system mass models (crushable materials and air bag systems)

Supersonic retro propulsion mass model

Completed trade studies demonstrating the applicability of HIADs, and the recommended HIAD scale, within high priority robotic and human exploration missions at Earth and Mars

- Direct entry to Mars Southern Highlands (0-4 km MOLA)
- Mars aerocapture in support of human exploration
- MPCV L2 and lunar return
- MPCV fast transit (Mars return)
- Launch vehicle asset recovery (Space-X Falcon 9)

Identified the sensitivity of recommended HIAD scale to mission parameters (entry conditions) and key assumptions such as flexible TPS performance limits

6 –25 meter HIAD Class

Robotic Missions
(entry or aerocapture):
– *Mars*
– *Venus*
– *Titan*
– *Neptune (and other gas giants)*

Robotic or Crewed Earth Return
(entry or aerocapture):
– *LEO (including ISS)*
– *GEO, NEO, Lunar*

DoD Applications

Technology Development & Risk Reduction for Human Mars Missions

HIAD FTPS: Path Forward

Ground Testing & Implementation
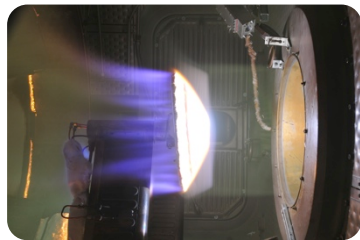
IRVE-3 Nose Cap Test TP2 – 2011

Shear Testing LCAT – 2011-2012
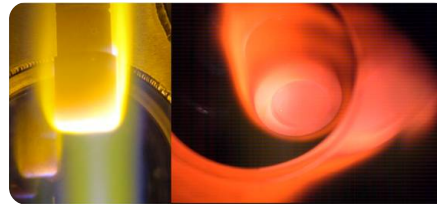
Catalycity Testing UVM – 2011

Stagnation Testing LCAT– 2012

TPS EDU for 6 m IAD – 2012-2013

Modeling & Analysis
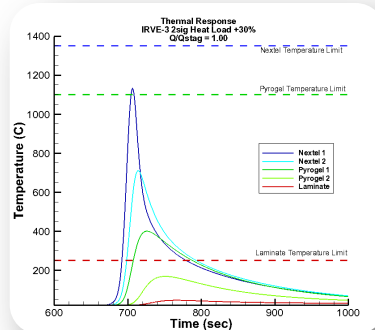
1-D Model (Test correlated) 2009-2012

1-D Model Physics Based Model 2011-2012 (Coming Soon)

TPS Margin Policy (Monte-Carlo Based – 2012)

Inflatable Structure: Path Forward

Ground Testing & Implementation

Static Load Test
3m (2011-2012)
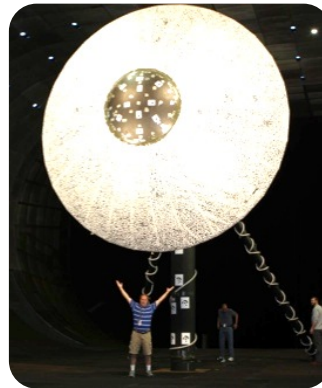
Aero Load/Deflection Test
6 m Dia (NFAC-2012)
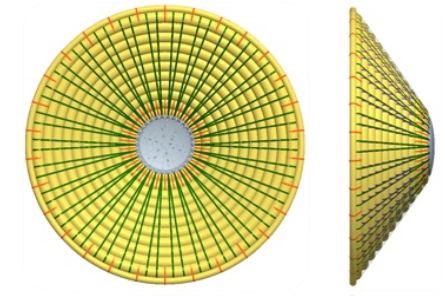
Load/Deflection Test (w/ TPS)
6 m Dia (2013/2014)

Modeling & Component Testing

Inflatable Structure material property
characterization
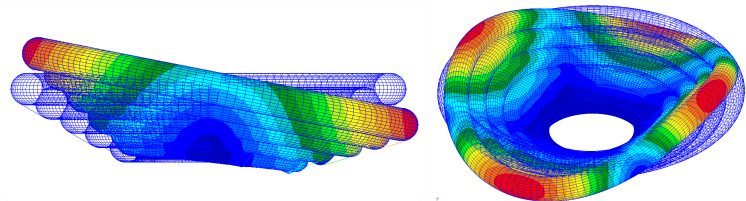
Structural Modeling
capability

IRVE-3 Nominal Mission

Apogee
366s, 474km

Coast…

Aeroshell Release
429s, 457km
Start Aeroshell Inflation
433s, 455km

Eject Nose Cone
102s, 177km

ACS Reorientation
587s, 266km (40s duration)

Actuate CG offset system
628s, 181km (1s duration)

NIACS damps rates
91s, 152km (10s duration)

Atmospheric Interface, 25Pa (666s, ~86km)

Separate RV & Nose Cone
From Brant & Transition
90s, 152km

RV Peak Heat Rate 14-17W/cm2
680s, 50km, Mach 7 (peak Mach 10.2)

RV Peak Dynamic Pressure
685s, 41km, 20.8g's

Yo-Yo De-Spin, 80.0s
Brant Burnout, 56.9s
Brant Ignition, 23.0s
Taurus Separation 21.0s
Taurus Burnout, 18.5s
Taurus Ignition, 15.0s
Talos Burnout, 6.4s
Spin Motor Ignition, 0.9s
Leaves Rail, 0.5s
Talos Ignition, 0s

**Reentry Experiment Complete at Mach <
0.7** (709s, 27km)
CG Offset Maneuvers

LOS by land radar & TM
12-29km altitude

Vent NIACS and Inflation System Gas

Launch on Black Brant-XI from WFF
940lb payload, El 84deg, Az 155deg

RV splashdown at 30m/s
383km downrange (1193s)

Recovery Attempt

Success Criteria Assessment

Minimum Success Criteria

Title	Description	Status	Flight Results
RV Separation	The RV separates from the LV and nose cone assembly and does not re-contact either component.	G	No re-contact shown in video; checking IMU data.
RV Aeroshell Inflation	The RV inflatable aeroshell inflates to the designed shape prior to atmospheric interface.	G	Geometry looks good on video; processing drag data.
RV CG Offset Configuration	The RV reconfigures to generate a known radial CG offset prior to atmospheric interface.	G	CGO string pots measured translation distance.
RV Flight Performance	The RV flight performance data is captured from atmospheric interface through the end of the flight experiment.	G	Flight data was captured from launch past the end of the experiment.

Success Criteria Assessment

Comprehensive Success Criteria

Title	Description	Status	Flight Results
RV Data Set	The RV data set as specified in the Mission Telemetry Requirements (MTR) document is captured from launch through the end of the flight experiment.	G	Data was captured from launch past the end of the experiment.
RV Body Axis Alignment	At atmospheric interface, the Attitude Control System (ACS) has aligned the RV body axis with the trim angle of attack within 5 degrees, with a total rate of change less than 10 degrees/sec.	G	Attitude looks good in video data; processing IMU data.
RV Roll Angle	The ACS maintains a RV roll angle of 0 degrees ± 5 degrees from atmospheric interface through the end of the flight experiment.	G	No spin-up in video data; processing IMU data.
RV Aeroshell Inflation Maintenance	The RV maintains inflation from atmospheric interface through the end of the flight experiment.	G	RV maintained inflation past the end of the experiment.
RV Reentry Heating	Flight data confirms that the aeroshell experienced reentry heating of at least 12 W/cm2 (cold wall).	G	Flux sensor indicated 15.6W/cm2; verifying with CFD.

- **IRVE-3 trajectory reconstruction drives a number of post-flight analysis activities including thermal, structures, aero-performance, and flight dynamics analysis**
- **On-board instrumentation for re-entry trajectory reconstruction included:**
  - GLN-MAC (gimbaled LN-200: accelerations and body rates)
  - GPS (position and velocity observations)
  - Nose cap pressure sensors and heat flux gauges
  - 4 video cameras (shape observations)
- **Trajectory reconstruction performed in 3 steps:**
  - Pure inertial reconstruction compares well with the on-board navigation
  - GPS aiding improves attitude estimates, better captures sideslip
  - Additional aiding by the pressure measurements helps resolve density
- **The post-flight simulation captures observed launch performance which should reduce much of the dispersion seen in pre-flight trajectory estimates**
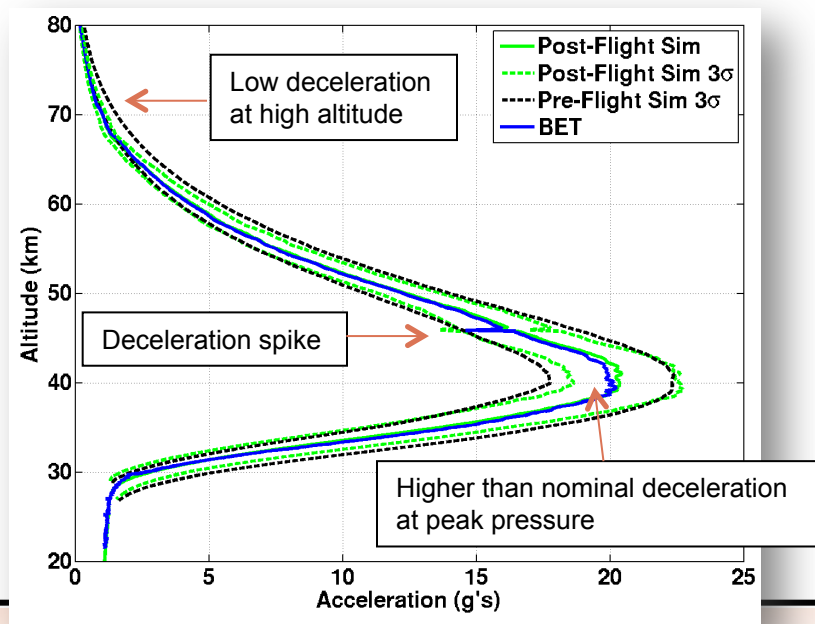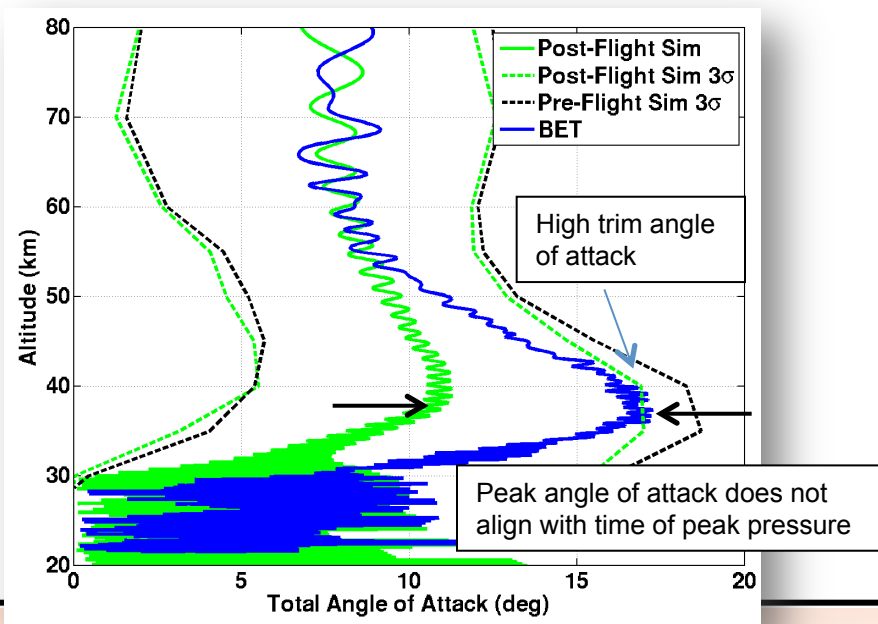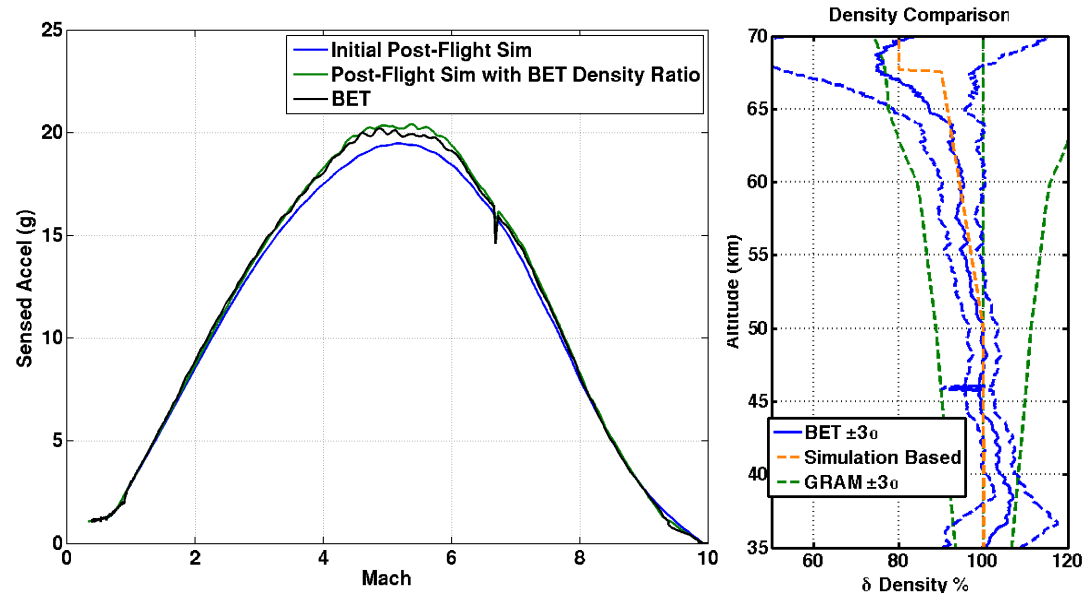
- **Low deceleration at high altitude**
  - Deceleration at entry-interface through 67 km less than 2-sigma low

- **High peak deceleration**
  - Deceleration at peak pressure 1-sigma high relative to the nominal post-flight estimate
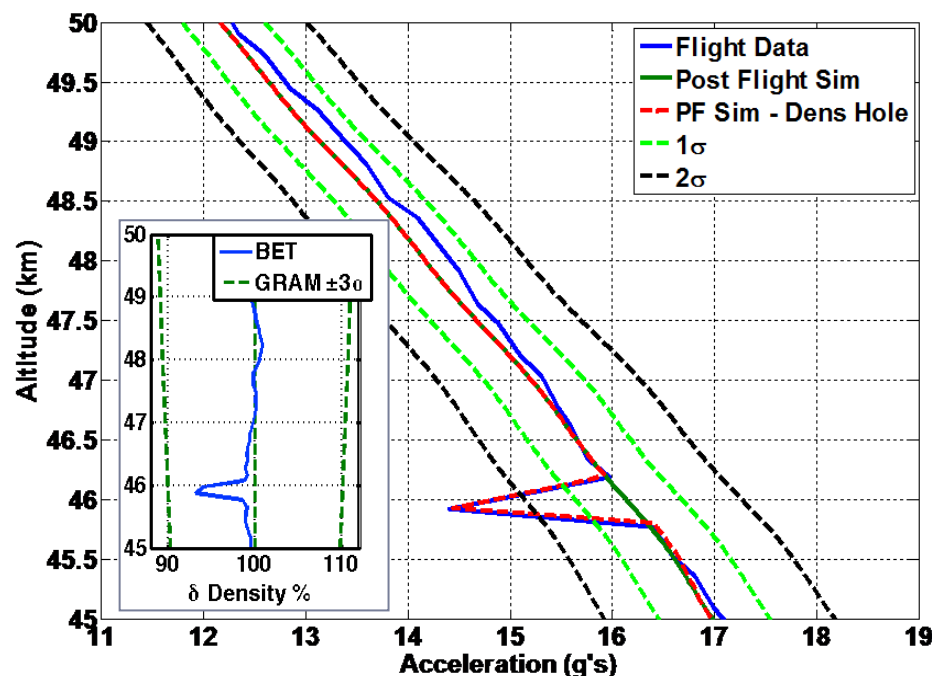

Post-Flight Analysis

| Potential Cause	Analysis Findings	Disposition
Aerodynamics	• BET-based aero coefficients confirm pre-flight predicted drag performance • HIAD pressure sensors confirm that it is fully inflated at entry	Not a contributor
Atmospheric uncertainty	• Density estimates based on pressure measurements help reconcile deceleration profile during pressure pulse • Assuming nominal drag performance, simulation analysis estimates a 20% reduction in nominal density at altitude • This level of density is consistent with pressure-based estimates	Primary cause

Deceleration Spike

- 1.5 g reduction in acceleration over 100 msec

- Event seen in accelerometer and pressure sensor data

- Nominal deceleration profile observed before and immediately following the event

Post-Flight Analysis

| Potential Cause	Analysis Findings	Disposition
Atmosphere	• Simulation studies indicate an 11% dip in density is required to reproduce the deceleration spike • Similar level of density reduction predicted in the BET based on pressure measurements	Primary cause
Structural	• Aeroshell vibration is visible in the flight video but no apparent slip or sudden deformation	Not a contributor

Structural Performance

Overlaid video images at entry interface and peak pressure

Starboard Camera

205:11:12:05.505
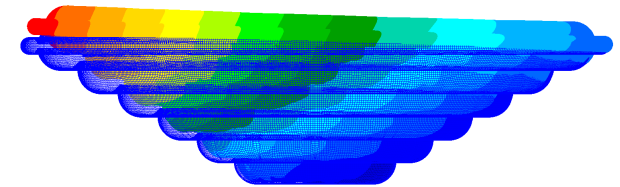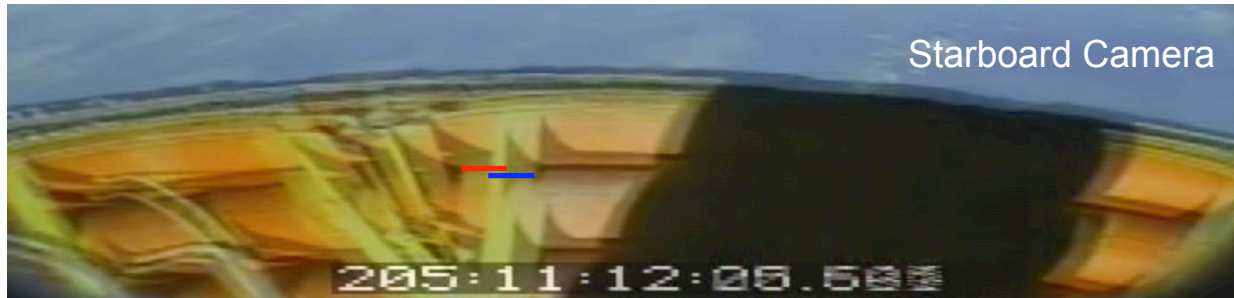
FEA and CFD analysis used to predict and interpret aeroshell deflection

- **Structural deflections contribute to vehicle trim angle of attack**
  - Analytical models used to predict and interpret structural effects
- **Flight video used to extract aeroshell pitch deformation**
  - Landmark tracking used in the video along with overlaid frames to measure relative translation of aeroshell
  - Converted to angle by distance to rocking mode shape "pivot point" from FEA analysis
  - CG offset mechanism deflection obtained from in-flight measurements
  - Relative pitch angle of the mechanism observed to plateau at ~0.2° due to bottoming out of the bearing springs
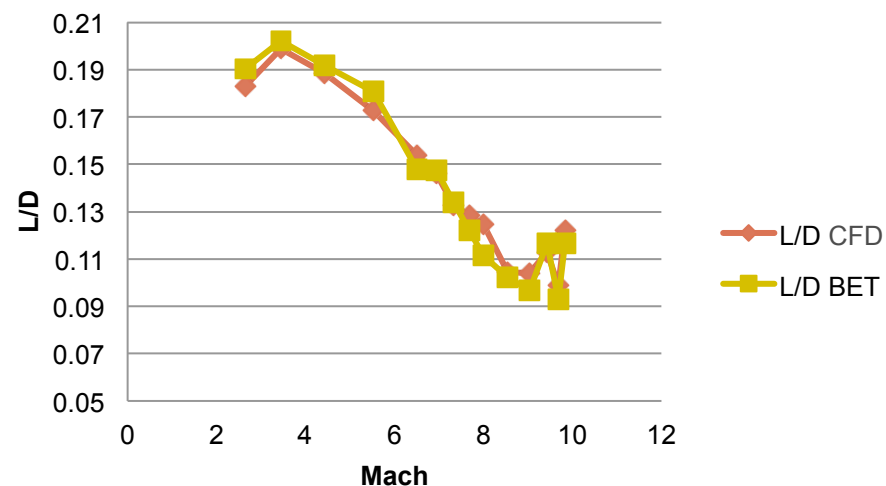 - Limit of 0.2° applied to post-flight simulations

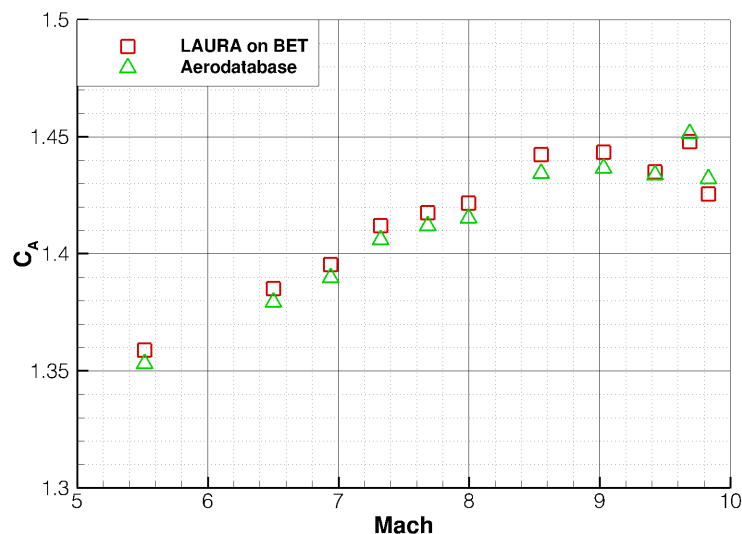**Observed Deflections**
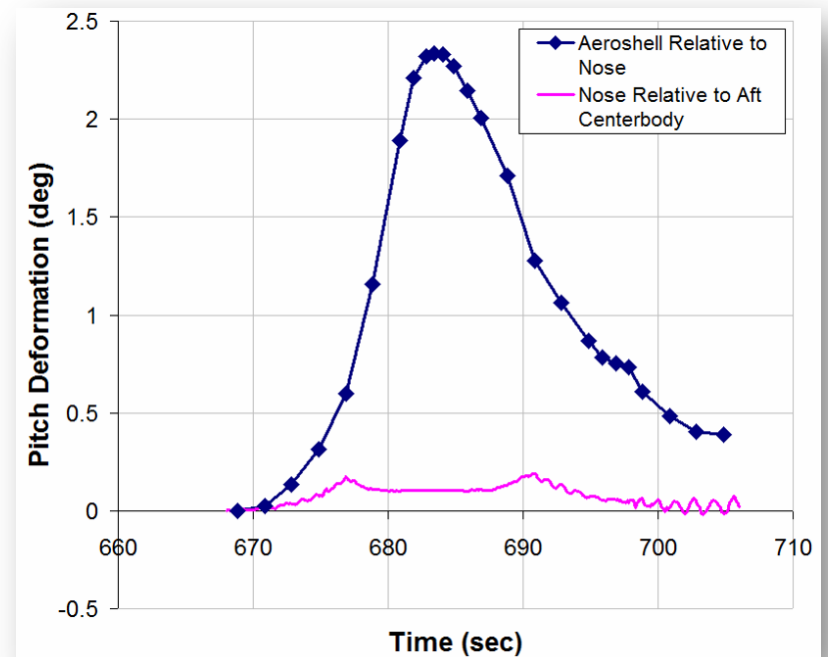
- **Aero coefficients computed from the BET**
  - Ignores ACS thrust (roll control)
  - Mass from pre-flight simulation model

- **Post-flight CFD consistent with pre-flight modeling assumptions**

- **L/D comparisons verify that the aero database force coefficients are accurate**

LAURA Aerodynamics on IRVE-3 BET Compared to Pre-Flight Aerodatabase
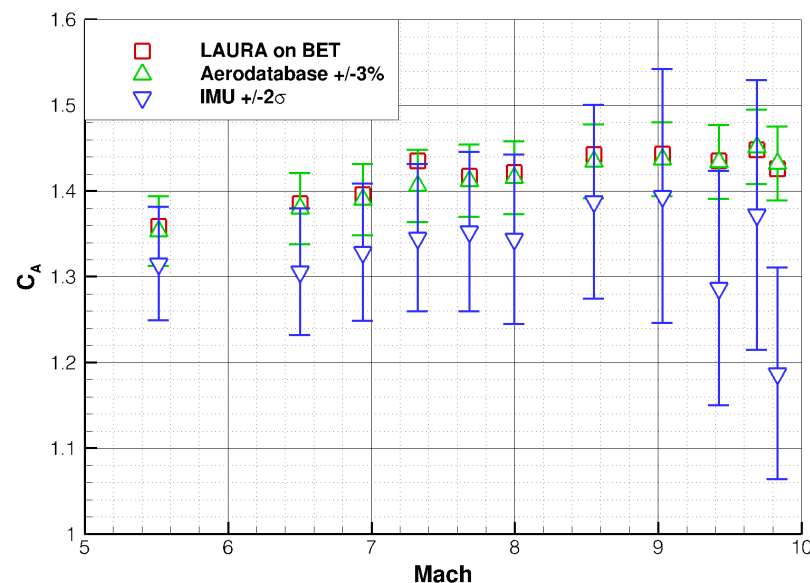
- High Angle of Attack
  - 3-sigma excursion in angle of attack during the pressure pulse
    - Growth of angle of attack with dynamic pressure indicative of aeroshell pitch deflection
  - Observed angle of attack reaches its maximum value later than simulation predicts
   - Possible aerodynamic or structural effect
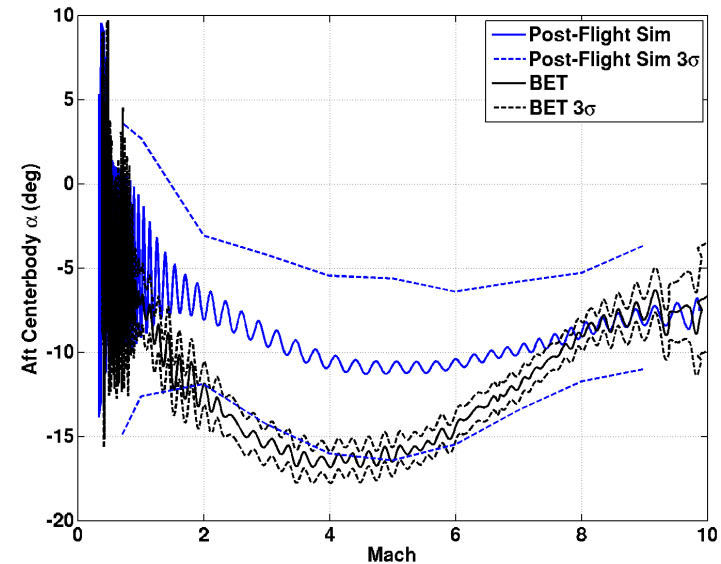
Post-Flight Analysis

| Potential Cause	Analysis Findings	Disposition
Atmosphere	• Higher than predicted peak pressure due to atmosphere effects	Small Contributor
Aeroshell deflection	• Trim angle of attack is very sensitive to rotation of aeroshell due to alignment, CGO rotation, and "rocking mode" deflection	Contributor
Baseline aerodynamics	• Design OML aerodynamic uncertainties	Contributor
Other shape changes	• Change in pitch stability due to pressure distribution over deformed shape a possible contributor	Inconclusive
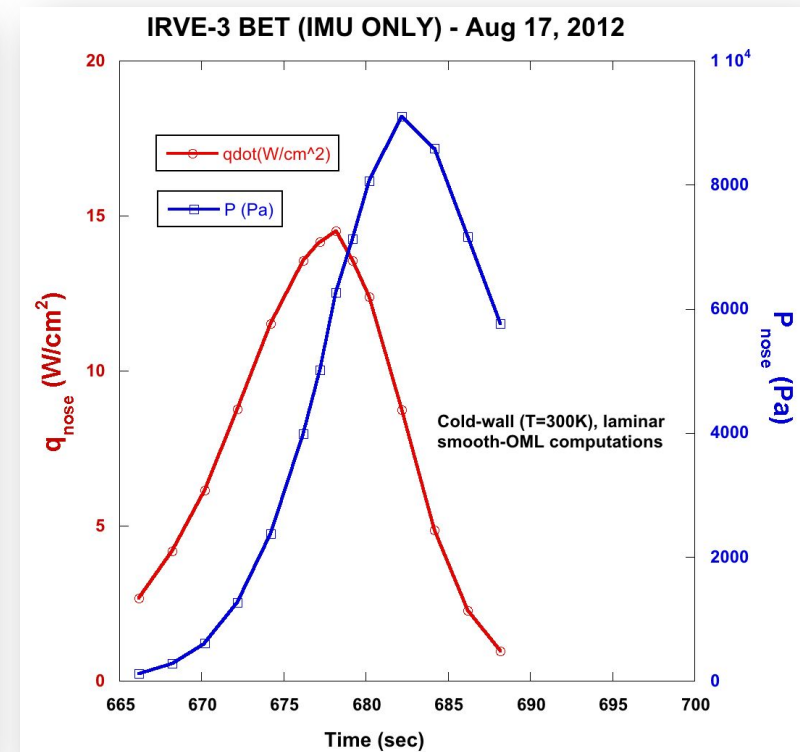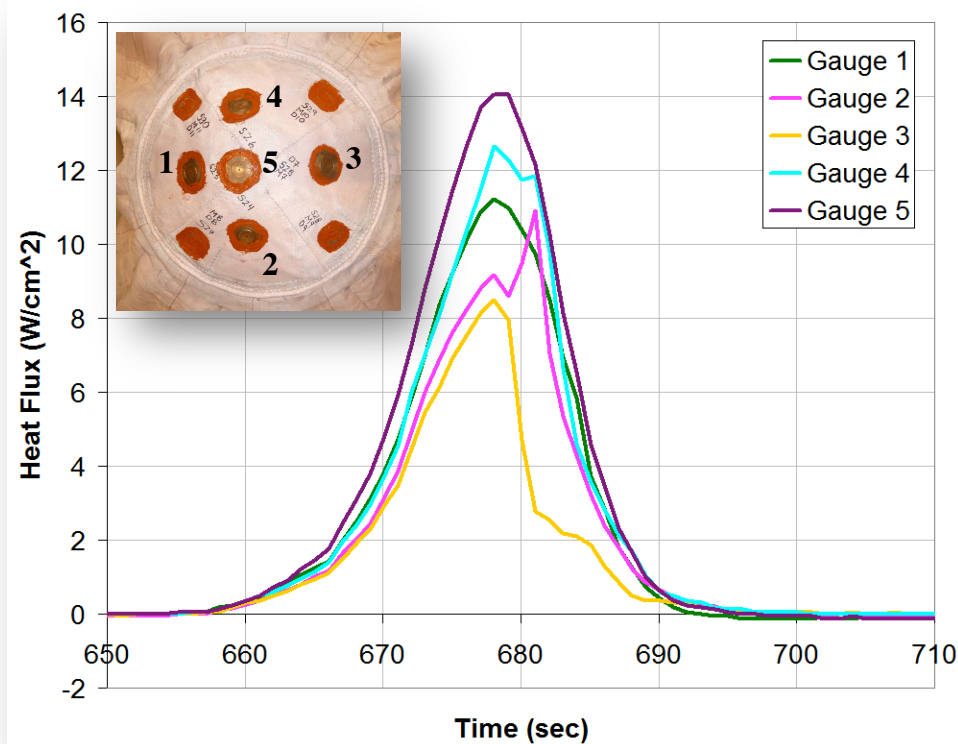
- **Measurement and calculation confirm that IRVE-3 exceeded the 12 W/cm² peak heat rate requirement**
  - Heat flux gauges read up to 14 W/cm²
    - Expected uncertainty of +/- 15%
  - CFD solutions on the preliminary BET estimate a peak heat rate of 14.5 W/cm²
    - Expected uncertainty of +/- 10%

- **Analysis data does not match flight data**
  - Analysis data over predicts flight data

- **Flight data has been checked and appears to be accurate**

- **Forward Work**
  - Evaluating input data to code
    - Recovery Temperature
    - Material properties


Location 11
TC=NC_S23, Angle=0.0-deg
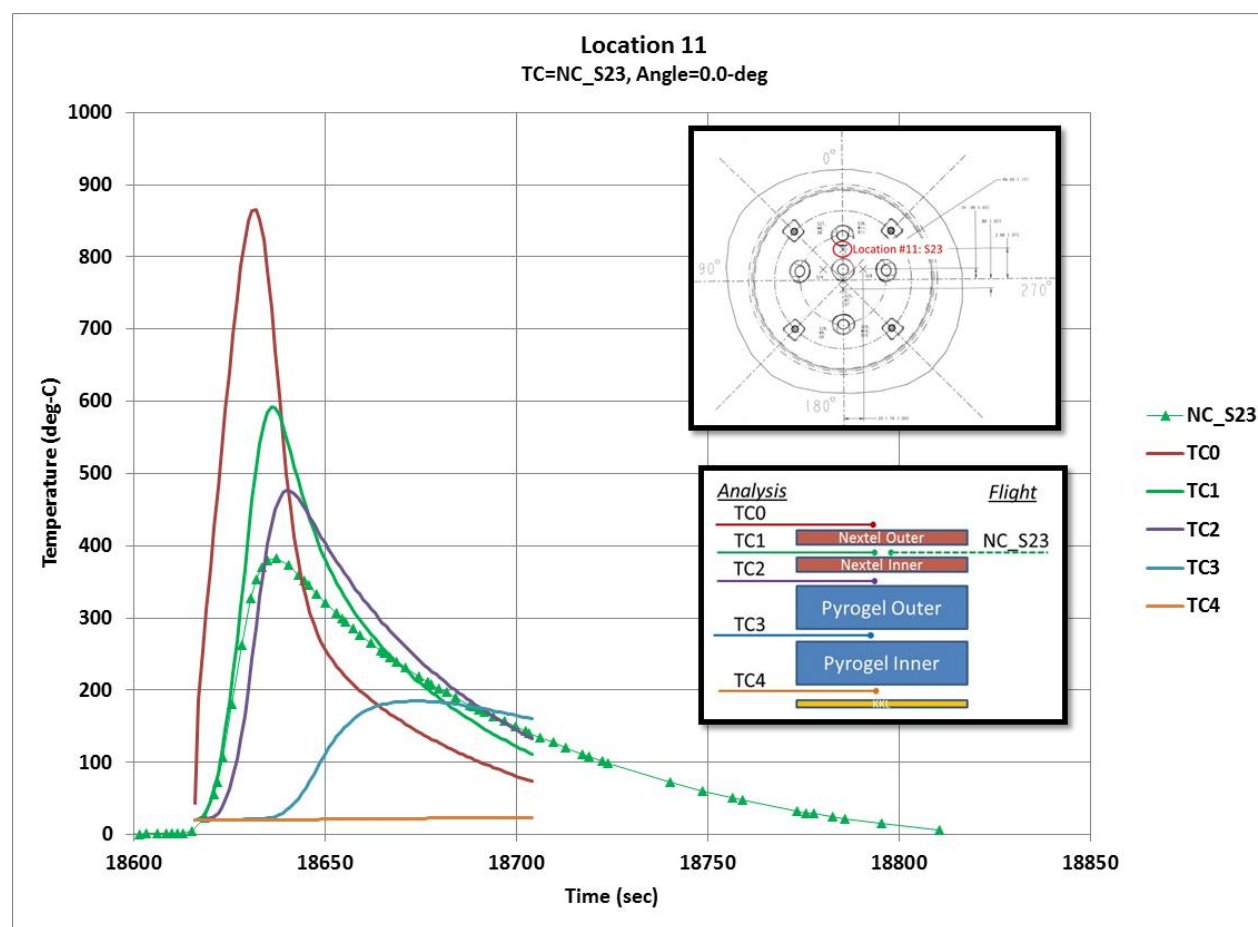
IRVE-4 (Build to Print) Status

- **RV hardware fabrication complete**

- **RV Assembly**
  - Inflation System Segment subassemblies complete
  - CG Offset Segment mechanical subassemblies complete
  - TM Segment assembly complete, with antenna installation on standby
  - NIACS Segment assembly complete, with gyro installation on standby
  - Nose and camera deck assemblies in process

- **Avionics**
  - Began updating and reorganizing engineering data from lessons learned on IRVE-3
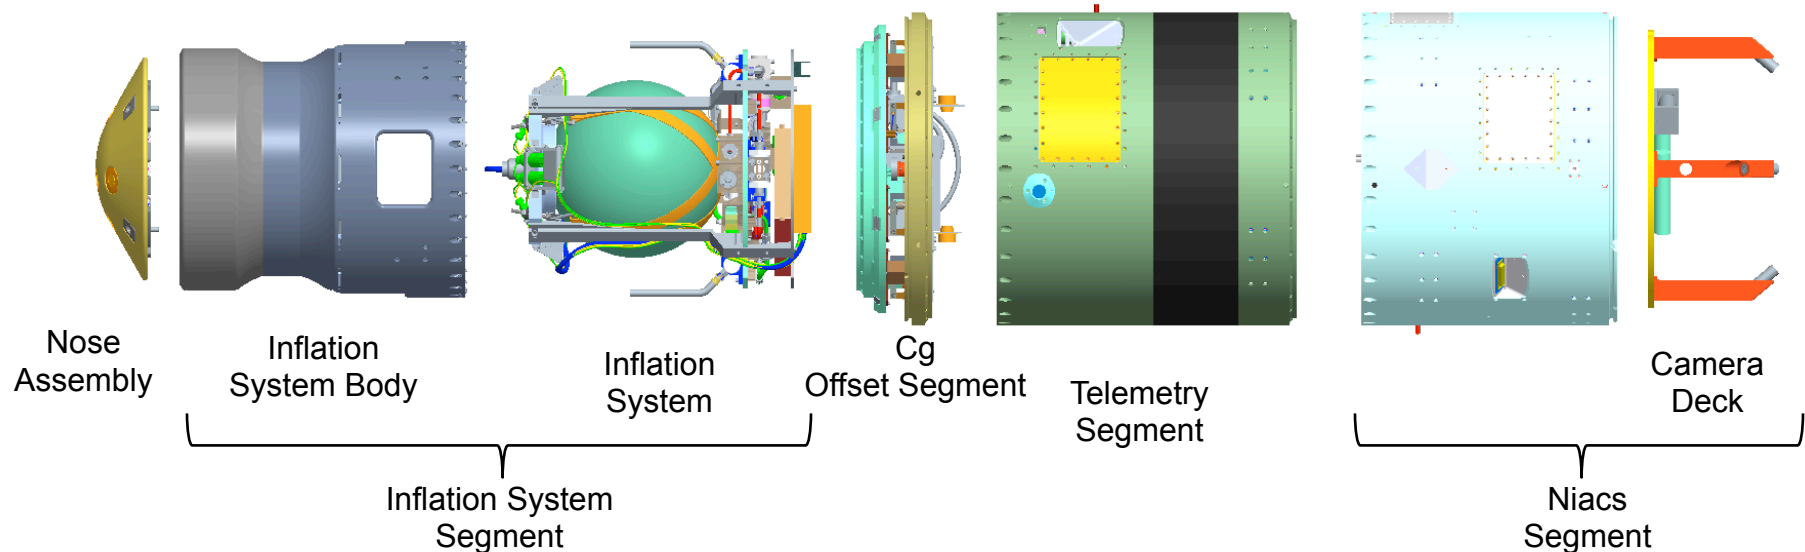 - Began checkout and calibration of avionics boxes
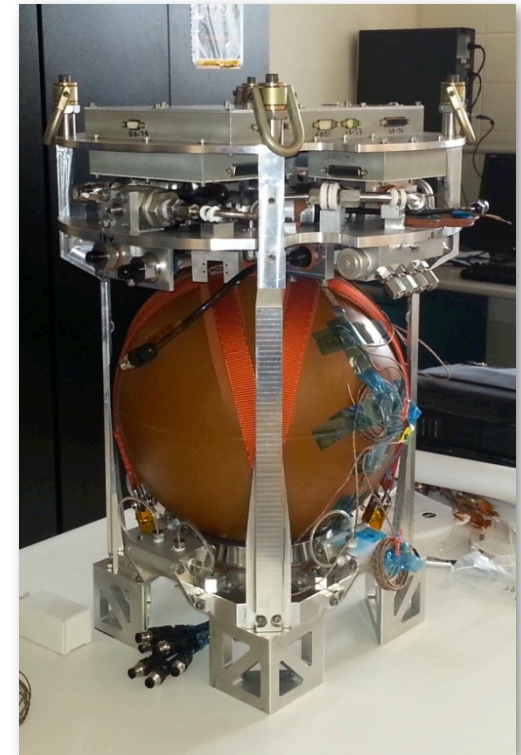
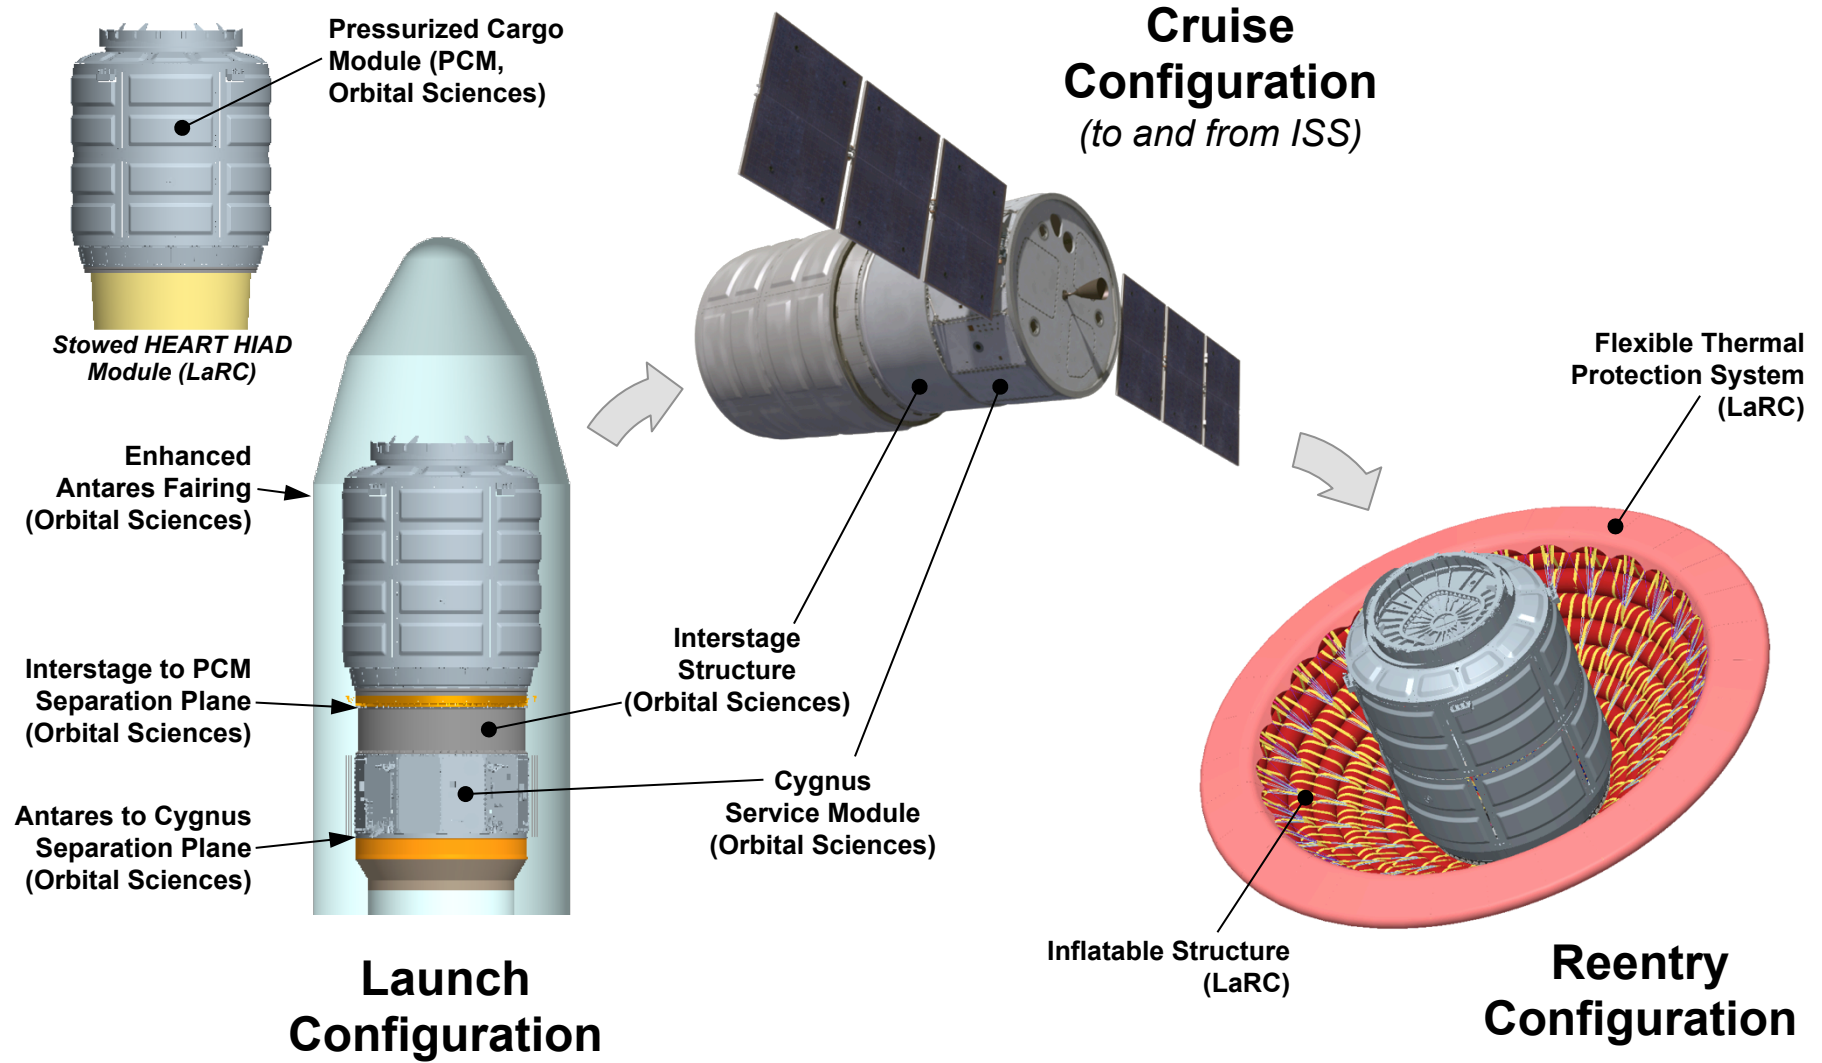**IRVE-4 Inflation System (ready for avionics integration)**

- **Complete engineering data packages and checkout of Avionics**

- **Perform fit check of Nose Assembly (excluding TPS), Inflation System Segment, and CG Offset Segment with Avionics components and initial wire harness routing**

- **Complete functional testing and finalize flight integration of Avionics with Inflation System and CG Offset Segments**

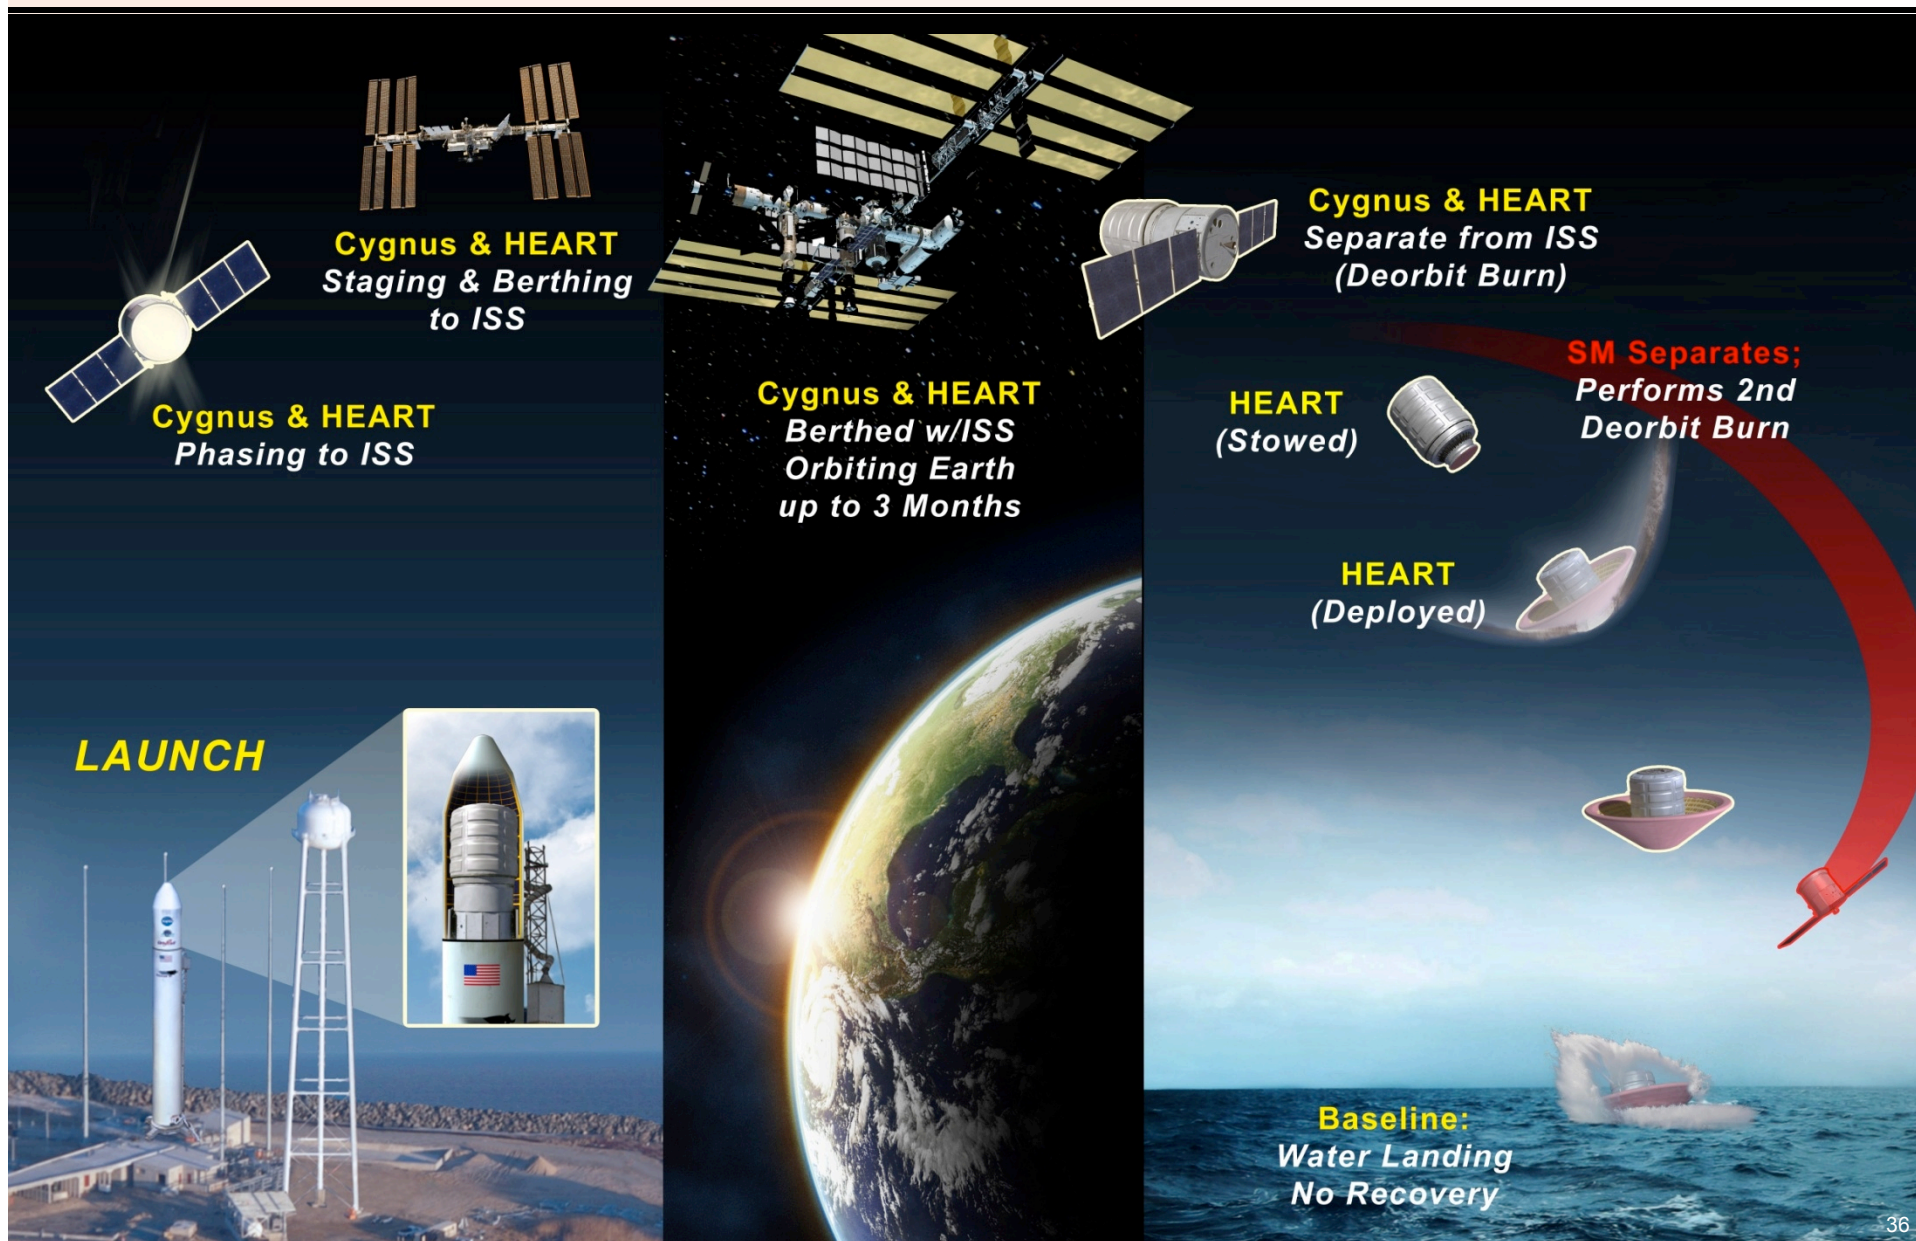- **Perform workmanship vibe testing of Inflation System and CG Offset**

Nose Assembly · Inflation System Body · Inflation System · Cg Offset Segment · Telemetry Segment · Camera Deck

Inflation System Segment · Niacs Segment

The HEART Concept

Pressurized Cargo Module (PCM, Orbital Sciences)

Stowed HEART HIAD Module (LaRC)

Enhanced Antares Fairing (Orbital Sciences)

Interstage to PCM Separation Plane (Orbital Sciences)

Antares to Cygnus Separation Plane (Orbital Sciences)

Interstage Structure (Orbital Sciences)

Cygnus Service Module (Orbital Sciences)

Launch Configuration

Cruise Configuration
(to and from ISS)

Flexible Thermal Protection System (LaRC)

Inflatable Structure (LaRC)

Reentry Configuration

LAUNCH

Cygnus & HEART
Phasing to ISS

Cygnus & HEART
Staging & Berthing
to ISS

Cygnus & HEART
Berthed w/ISS
Orbiting Earth
up to 3 Months

Cygnus & HEART
Separate from ISS
(Deorbit Burn)

HEART
(Stowed)

HEART
(Deployed)

SM Separates;
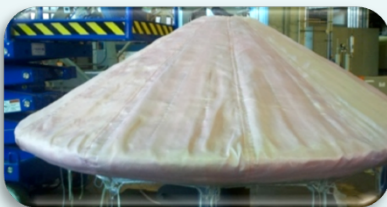Performs 2nd
Deorbit Burn

Baseline:
Water Landing
No Recovery

Technology Maturation from the HIAD Project

HEART Baseline TPS and Inflatable Structure are directly derived from the IRVE-3 Flight Test and HIAD Ground Developments
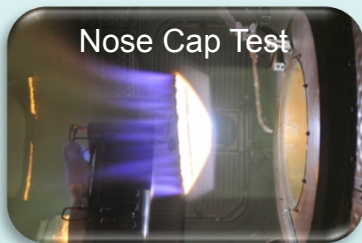
TPS

TPS EDU for 6 m IAD – 2012/2013

Catalycity Testing UVM – 2011

Shear Testing LCAT – 2011/2012

Nose Cap Test

Stagnation Testing TP2 – 2011

TPS Modeling

IRVE-3
July 23, 2012

Integrated Demonstration Flight Test – IRVE-3

Inflatable Structure

**Structural Modeling**

Static Load Test 3m Dia FY11 & FY12

Aero Load & Deflection Test 6 m Dia (NFAC-2012)

IS mat'l prop. characterization

HIAD Future Plans & Challenges

- **FY13 Plans:**

  – Complete the fabrication of the 6-m TPS

  – Complete the fabrication of the 6-m Inflatable Article

  – Complete the HTT TPS Aeroelastic Flutter Tests

  – Complete FY13 LCAT testing

  – Complete FY13 LAL testing

  – Continue Thermal and Structural Model Designs

  – Deliver 21 Technical papers and 6 Conferences

- **Challenges**

  – Converting workforce from WYE to CS

  – Lack of procurement funds